

## Axial lead diode

### Schottky barrier rectifiers diodes

#### SB 220...SB 2100

**Forward Current: 2 A**

**Reverse Voltage: 20 to 100 V**

#### Features

- Max. solder temperature: 260°C
- Plastic material has UL classification 94V-0

#### Mechanical Data

- Plastic case DO-15 / DO-204AC
- Weight approx.: 0,4 g
- Terminals: plated terminals solderable per MIL-STD-750
- Mounting position: any
- Standard packaging: 4000 pieces per ammo

1) Valid, if leads are kept at ambient temperature at a distance of 10 mm from case

2)  $I_F = 2 \text{ A}$ ,  $T_j = 25^\circ\text{C}$

3)  $T_A = 25^\circ\text{C}$

Type	Repetitive peak reverse voltage $V_{RRM}$ V	Surge peak reverse voltage $V_{RSM}$ V	Max. reverse recovery time $t_{rr}$ ns	Max. forward voltage $V_F^2)$
SB 220	20	20	-	0,50
SB 230	30	30	-	0,50
SB 240	40	40	-	0,50
SB 250	50	50	-	0,70
SB 260	60	60	-	0,70
SB 290	90	90	-	0,79
SB 2100	100	100	-	0,79

#### Absolute Maximum Ratings

$T_A = 25^\circ\text{C}$ , unless otherwise specified


Symbol	Conditions	Values	Units
$I_{FAV}$	Max. averaged fwd. current, R-load, $T_A = 50^\circ\text{C}$ <sup>1)</sup>	2	A
$I_{FRM}$	Repetitive peak forward current $f > 15 \text{ Hz}^1)$	12	A
$I_{FSM}$	Peak forward surge current 50 Hz half sinus-wave <sup>3)</sup>	50	A
$i^2t$	Rating for fusing, $t < 10 \text{ ms}$ <sup>3)</sup>	12,5	A <sup>2</sup> s
$R_{thA}$	Max. thermal resistance junction to ambient <sup>1)</sup>	45	K/W
$R_{thT}$	Max. thermal resistance junction to terminals <sup>1)</sup>	15	K/W
$T_j$	Operating junction temperature	-50...+150	°C
$T_s$	Storage temperature	-50...+175	°C

#### Characteristics

$T_A = 25^\circ\text{C}$ , unless otherwise specified

Symbol	Conditions	Values	Units
$I_R$	Maximum leakage current, $T_j = 25^\circ\text{C}$ ; $V_R = V_{RRM}$	<0,5	mA
	$T_j = 100^\circ\text{C}$ ; $V_R = V_{RRM}$	<5,0	mA
$C_J$	Typical junction capacitance (at MHz and applied reverse voltage of V)	-	pF
$Q_{rr}$	Reverse recovery charge ( $U_R = V$ ; $I_F = A$ ; $dI_F/dt = A/\text{ms}$ )	-	μC
$E_{RSM}$	Non repetitive peak reverse avalanche energy ( $I_R = \text{mA}$ ; $T_j = {}^\circ\text{C}$ ; inductive load switched off)	-	mJ

Dimensions in mm

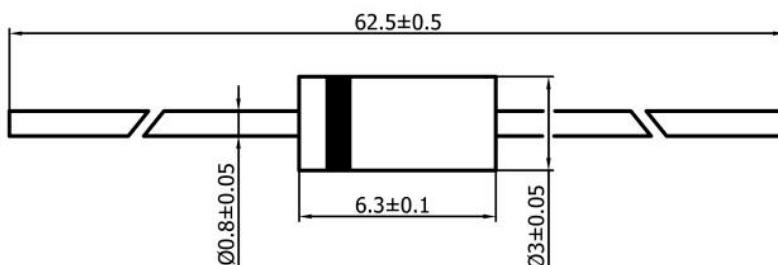

case: DO-15 / DO-204AC

# SB 220...SB 2100

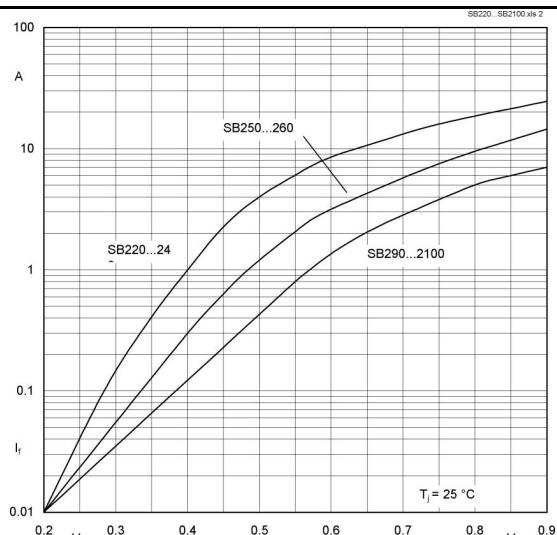


Fig. 1 Forward characteristic ( typical values )

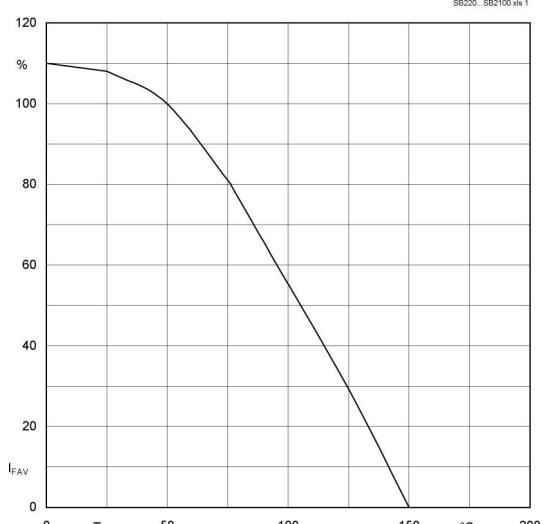


Fig. 2 Rated forward current vs. ambient temperature <sup>1)</sup>