

SPECIFICATION

Current Rate: 3 AMP
Insulation Resistance: 1000M Ω Min.
Contact Resistance: 20m Ω Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C


Standart height (H) = 2.5

MATERIAL

Insulator: Polyester, UL 94V-0
Standard: PBT or Nylon 6T
Contact Pin: Copper Alloy
Contact Plating: Gold Flash all over

PLS-xx

Pin Header 2.54mm 1 Row H=1.5/1.7/2.5mm Straight Type

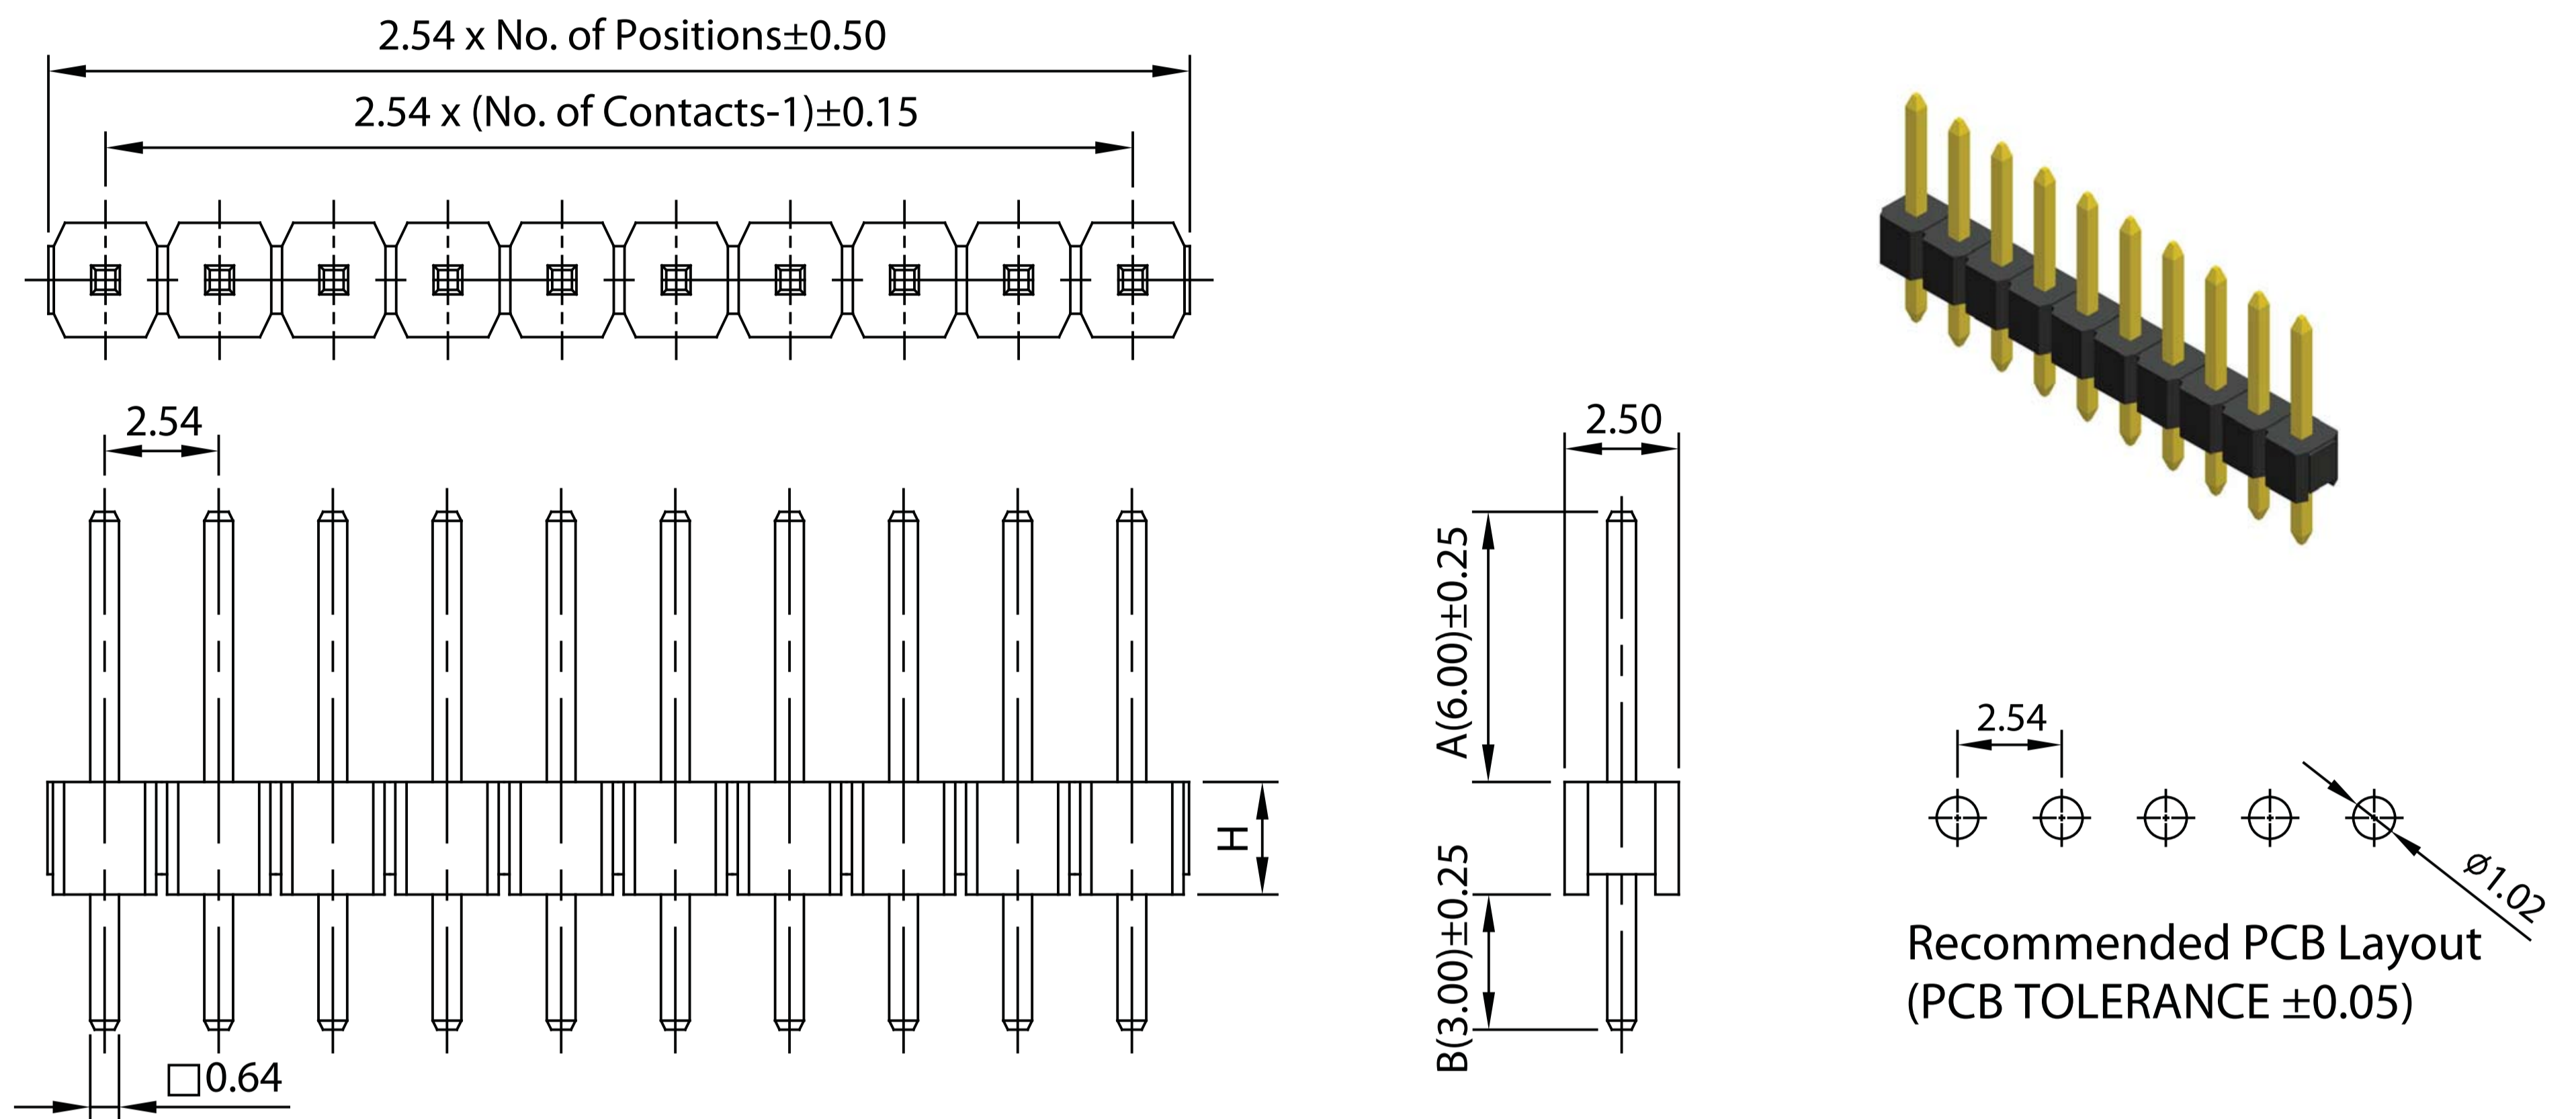

PLD-xx

Pin Header 2.54mm 2 Row H=1.5/1.7/2.5mm Straight Type

