


THREE TERMINAL NEGATIVE VOLTAGE REGULATORS -5V, -6V, -7V, -8V, -12V, -15V, -18V, -20V, -24V.

FEATURES

- Suitable for C-MOS, TTL, and the other digital IC power supply.
- Internal thermal overload protecting.
- Output Current up to 1.5A.
- Internal short circuit current limiting.
- Package is TO-220AB

LINE-UP

ITEM	OUTPUT VOLTAGE (Typ.)	UNIT
KIA7905P	-5	V
KIA7906P	-6	
KIA7907P	-7	
KIA7908P	-8	
KIA7909P	-9	
KIA7910P	-10	
KIA7912P	-12	
KIA7915P	-15	
KIA7918P	-18	
KIA7920P	-20	
KIA7924P	-24	

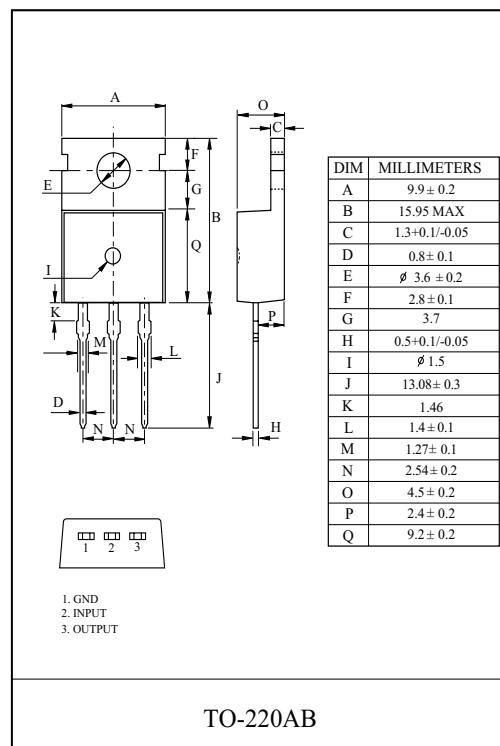


MAXIMUM RATINGS (Ta=25℃)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Input Voltage	KIA7905P ~ KIA7915P	V _{IN}	-35	V
	KIA7918P ~ KIA7924P		-40	
Power Dissipation-1 (No Heatsink)		P _{D1}	1.9	W
Power Dissipation-2 (Infinite Heatsink)		P _{D2}	30	W
Operating Junction Temperature		T _j	-40 ~ 150	℃
Storage Temperature		T _{stg}	-55 ~ 150	℃
Maximum Junction Temperature		T _{j(max)}	150	℃

KIA7905P~KIA7924P

EQUIVALENT CIRCUIT

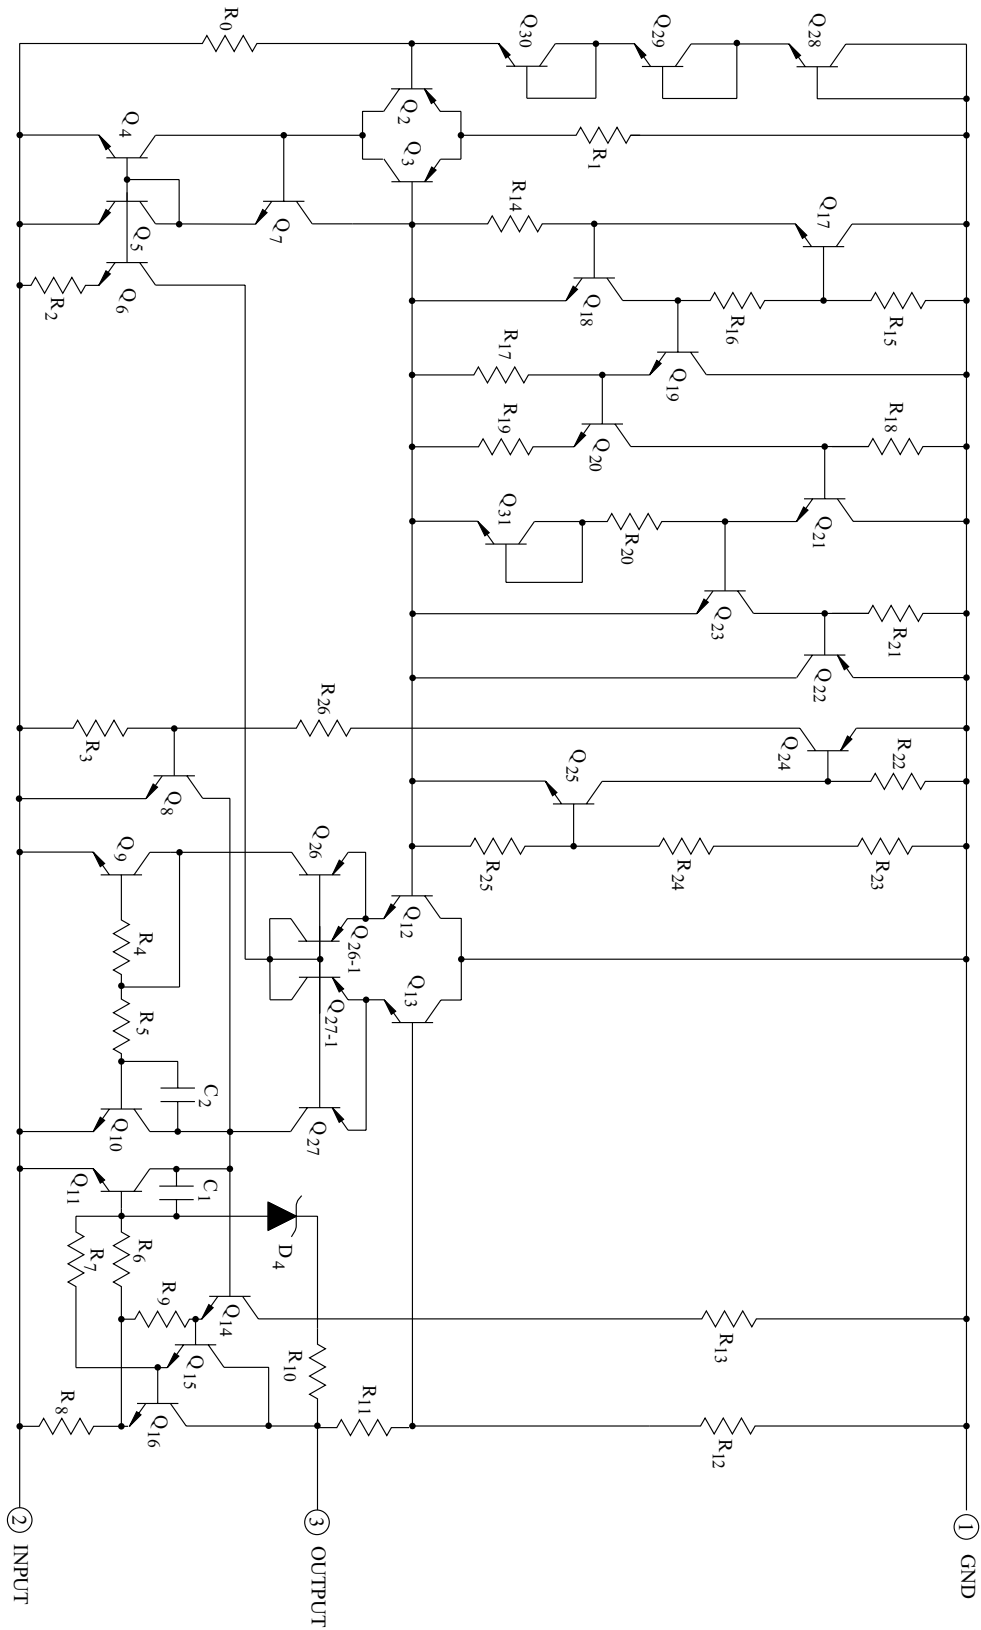

KIA7905P~KIA7924P

ELECTRICAL CHARACTERISTICS

KIA7905P

(Unless otherwise specified, $V_{IN}=-10V$, $I_{OUT}=500mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{IN}=2.2\mu F$, $C_{OUT}=1\mu F$)

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_{OUT}	Fig.1	$T_j=25^{\circ}C$	-5.2	-5.0	-4.8	V
Input Regulation	Reg line	Fig.1	$T_j=25^{\circ}C$	$-12V \leq V_{IN} \leq -8V$	-	5	mV
				$-25V \leq V_{IN} \leq -7V$	-	10	
Load Regulation	Reg load	Fig.1	$T_j=25^{\circ}C$	$5mA \leq I_{OUT} \leq 1.5A$	-	10	mV
				$250mA \leq I_{OUT} \leq 750mA$	-	3	
Output Voltage	V_{OUT}	Fig.1	$-20V \leq V_{IN} \leq -7V$ $5mA \leq I_{OUT} \leq 1.0A$	-5.25	-5.0	-4.75	V
Quiescent Current	I_B	Fig.1	$T_j=25^{\circ}C$	-	3	6	mA
Quiescent Current Change	ΔI_{BI}	Fig.1	$-25V \leq V_{IN} \leq -8V$	-	0.1	1.3	mA
	ΔI_{BO}		$5mA \leq I_{OUT} \leq 1.0A$	-	0.05	0.5	
Output Noise Voltage	V_{NO}	Fig.2	$T_a=25^{\circ}C$, $10Hz \leq f \leq 100kHz$	-	100	-	μV_{rms}
Ripple Rejection Ratio	RR	Fig.3	$f=120Hz$, $I_{OUT}=20mA$,	54	60	-	dB
Short Circuit Current Limit	I_{SC}	Fig.1	$T_j=25^{\circ}C$	-	1.9	-	A
Average Temperature Coefficient of Output Voltage	T_{CVO}	Fig.1	$I_{OUT}=5.0mA$	-	-0.4	-	mV/ $^{\circ}C$
Dropout Voltage	V_D	Fig.1	$T_j=25^{\circ}C$, $I_{OUT}=1A$	-	2.0	-	V

KIA7905P~KIA7924P

ELECTRICAL CHARACTERISTICS

KIA7906P

(Unless otherwise specified, $V_{IN}=-11V$, $I_{OUT}=500mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{IN}=2.2\mu F$, $C_{OUT}=1\mu F$)

CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage		V_{OUT}	Fig.1	$T_j=25^{\circ}C$		-6.25	-6.0	-5.75	V
Input Regulation		Reg line	Fig.1	$T_j=25^{\circ}C$	$-13V \leq V_{IN} \leq -9V$	-	5	60	mV
					$-25V \leq V_{IN} \leq -8V$	-	10	120	
Load Regulation		Reg load	Fig.1	$T_j=25^{\circ}C$	$5mA \leq I_{OUT} \leq 1.5A$	-	10	120	mV
					$250mA \leq I_{OUT} \leq 750mA$	-	3	60	
Output Voltage		V_{OUT}	Fig.1	$-21V \leq V_{IN} \leq -9V$ $5mA \leq I_{OUT} \leq 1.0A$		-6.3	-6.0	-5.7	V
Quiescent Current		I_B	Fig.1	$T_j=25^{\circ}C$		-	3	6	mA
Quiescent Current Change	Line	ΔI_{BI}	Fig.1	$-25V \leq V_{IN} \leq -9V$		-	-	1.3	mA
	Load	ΔI_{BO}		$5mA \leq I_{OUT} \leq 1.0A$		-	-	0.5	
Output Noise Voltage		V_{NO}	Fig.2	$T_a=25^{\circ}C$, $10Hz \leq f \leq 100kHz$		-	130	-	μV_{rms}
Ripple Rejection Ratio		RR	Fig.3	$f=120Hz$, $I_{OUT}=20mA$,		54	60	-	dB
Short Circuit Current Limit		I_{SC}	Fig.1	$T_j=25^{\circ}C$		-	1.9	-	A
Average Temperature Coefficient of Output Voltage		T_{CVO}	Fig.1	$I_{OUT}=5mA$		-	-0.5	-	mV/ $^{\circ}C$
Dropout Voltage		V_D	Fig.1	$T_j=25^{\circ}C$, $I_{OUT}=1A$		-	2.0	-	V

KIA7905P~KIA7924P

ELECTRICAL CHARACTERISTICS

KIA7907P

(Unless otherwise specified, $V_{IN}=-12V$, $I_{OUT}=500mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{IN}=2.2\mu F$, $C_{OUT}=1\mu F$)

CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage		V _{OUT}	Fig.1	T _j =25 °C		-7.28	-7.0	-6.72	V
Input Regulation		Reg line	Fig.1	T _j =25 °C	-15V ≤V _{IN} ≤-10V	-	10	70	mV
					-25V ≤V _{IN} ≤-9V	-	45	140	
Load Regulation		Reg load	Fig.1	T _j =25 °C	5mA ≤I _{OUT} ≤1.5A	-	20	140	mV
					250mA ≤I _{OUT} ≤750mA	-	7	70	
Output Voltage		V _{OUT}	Fig.1	-22V ≤V _{IN} ≤-9V 5mA ≤I _{OUT} ≤1.0A		-7.35	-	-6.65	V
Quiescent Current		I _B	Fig.1	T _j =25 °C		-	4.3	8.0	mA
Quiescent Current Change	Line	ΔI _{BI}	Fig.1	-25V ≤V _{IN} ≤-9V		-	-	1.0	mA
	Load	ΔI _{BO}		5mA ≤I _{OUT} ≤1.0A		-	-	0.5	
Output Noise Voltage		V _{NO}	Fig.2	Ta=25 °C, 10Hz ≤f ≤100kHz		-	49	-	μV _{rms}
Ripple Rejection Ratio		RR	Fig.3	f=120Hz, I _{OUT} =20mA,		60	67	-	dB
Short Circuit Current Limit		I _{SC}	Fig.1	T _j =25 °C		-	1.9	-	A
Average Temperature Coefficient of Output Voltage		T _{CVO}	Fig.1	I _{OUT} =5mA		-	0.9	-	mV/ °C
Dropout Voltage		V _D	Fig.1	T _j =25 °C, I _{OUT} =1A		-	2.0	-	V

KIA7905P~KIA7924P

ELECTRICAL CHARACTERISTICS

KIA7908P

(Unless otherwise specified, $V_{IN}=-14V$, $I_{OUT}=500mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{IN}=2.2\mu F$, $C_{OUT}=1\mu F$)

CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage		V _{OUT}	Fig.1	T _j =25℃		-8.3	-8.0	-7.7	V
Input Regulation		Reg line	Fig.1	T _j =25℃	-17V ≤V _{IN} ≤-11V	-	5	80	mV
					-25V ≤V _{IN} ≤-10.5V	-	10	100	
Load Regulation		Reg load	Fig.1	T _j =25℃	5mA ≤I _{OUT} ≤1.5A	-	12	160	mV
					250mA ≤I _{OUT} ≤750mA	-	4	80	
Output Voltage		V _{OUT}	Fig.1	-23V ≤V _{IN} ≤-11.5V 5mA ≤I _{OUT} ≤1.0A		-8.4	-8.0	-7.6	V
Quiescent Current		I _B	Fig.1	T _j =25℃		-	3	6	mA
Quiescent Current Change	Line	ΔI _{BI}	Fig.1	-25V ≤V _{IN} ≤-11.5V		-	0.1	1.0	mA
	Load	ΔI _{BO}		5mA ≤I _{OUT} ≤1.0A		-	0.05	0.5	
Output Noise Voltage		V _{NO}	Fig.2	Ta=25℃, 10Hz ≤f ≤100kHz		-	175	-	μV _{rms}
Ripple Rejection Ratio		RR	Fig.3	f=120Hz, I _{OUT} =20mA,		54	60	-	dB
Short Circuit Current Limit		I _{SC}	Fig.1	T _j =25℃		-	1.9	-	A
Average Temperature Coefficient of Output Voltage		T _{CV0}	Fig.1	I _{OUT} =5mA		-	-0.6	-	mV/℃
Dropout Voltage		V _D	Fig.1	T _j =25℃, I _{OUT} =1A		-	2.0	-	V

KIA7905P~KIA7924P

ELECTRICAL CHARACTERISTICS

KIA7909P

(Unless otherwise specified, $V_{IN}=-15V$, $I_{OUT}=500mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{IN}=2.2\mu F$, $C_{OUT}=1\mu F$)

CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage		V _{OUT}	Fig.1	T _j =25℃		-9.3	-9.0	-8.7	V
Input Regulation		Reg line	Fig.1	T _j =25℃	-19V ≤V _{IN} ≤-13V	-	5	90	mV
					-26V ≤V _{IN} ≤-11.5V	-	10	100	
Load Regulation		Reg load	Fig.1	T _j =25℃	5mA ≤I _{OUT} ≤1.5A	-	10	150	mV
					250mA ≤I _{OUT} ≤750mA	-	5	120	
Output Voltage		V _{OUT}	Fig.1	-24V ≤V _{IN} ≤-11.5V 5mA ≤I _{OUT} ≤1.0A		-9.4	-9.0	-8.6	V
Quiescent Current		I _B	Fig.1	T _j =25℃		-	3	6	mA
Quiescent Current Change	Line	ΔI _{BI}	Fig.1	-26.5V ≤V _{IN} ≤-13V		-	0.1	1.0	mA
	Load	ΔI _{BO}		5mA ≤I _{OUT} ≤1.0A		-	0.05	0.5	
Output Noise Voltage		V _{NO}	Fig.2	Ta=25℃, 10Hz≤f≤100kHz		-	180	-	μV _{rms}
Ripple Rejection Ratio		RR	Fig.3	f=120Hz, I _{OUT} =20mA,		54	60	-	dB
Short Circuit Current Limit		I _{SC}	Fig.1	T _j =25℃		-	1.9	-	A
Average Temperature Coefficient of Output Voltage		T _{CVO}	Fig.1	I _{OUT} =5mA		-	-0.7	-	mV/℃
Dropout Voltage		V _D	Fig.1	T _j =25℃, I _{OUT} =1A		-	2.0	-	V

KIA7905P~KIA7924P

ELECTRICAL CHARACTERISTICS

KIA7910P

(Unless otherwise specified, $V_{IN}=-16V$, $I_{OUT}=500mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{IN}=2.2\mu F$, $C_{OUT}=1\mu F$)

CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage		V _{OUT}	Fig.1	T _j =25℃		-10.4	-10	-9.6	V
Input Regulation		Reg line	Fig.1	T _j =25℃	-20V ≤V _{IN} ≤-14V	-	5	100	mV
					-27V ≤V _{IN} ≤-12.5V	-	10	110	
Load Regulation		Reg load	Fig.1	T _j =25℃	5mA ≤I _{OUT} ≤1.5A	-	10	180	mV
					250mA ≤I _{OUT} ≤750mA	-	6	120	
Output Voltage		V _{OUT}	Fig.1	-25V ≤V _{IN} ≤-12.5V 5mA ≤I _{OUT} ≤1.0A		-10.5	-10	-9.5	V
Quiescent Current		I _B	Fig.1	T _j =25℃		-	3	6	mA
Quiescent Current Change	Line	ΔI _{BI}	Fig.1	-27.5V ≤V _{IN} ≤-14V		-	0.1	1.0	mA
	Load	ΔI _{BO}		5mA ≤I _{OUT} ≤1.0A		-	0.05	0.5	
Output Noise Voltage		V _{NO}	Fig.2	Ta=25℃, 10Hz ≤f ≤100kHz		-	190	-	μV _{rms}
Ripple Rejection Ratio		RR	Fig.3	f=120Hz, I _{OUT} =20mA		54	60	-	dB
Short Circuit Current Limit		I _{SC}	Fig.1	T _j =25℃		-	1.9	-	A
Average Temperature Coefficient of Output Voltage		T _{CV0}	Fig.1	I _{OUT} =5mA		-	-0.7	-	mV/℃
Dropout Voltage		V _D	Fig.1	T _j =25℃, I _{OUT} =1A		-	2.0	-	V

KIA7905P~KIA7924P

ELECTRICAL CHARACTERISTICS

KIA7912P

(Unless otherwise specified, $V_{IN}=-18V$, $I_{OUT}=500mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{IN}=2.2\mu F$, $C_{OUT}=1\mu F$)

CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage		V _{OUT}	Fig.1	T _j =25℃		-12.5	-12	-11.5	V
Input Regulation		Reg line	Fig.1	T _j =25℃	-22V ≤V _{IN} ≤-16V	-	6	120	mV
					-30V ≤V _{IN} ≤-14.5V	-	12	240	
Load Regulation		Reg load	Fig.1	T _j =25℃	5mA ≤I _{OUT} ≤1.5A	-	12	240	mV
					250mA ≤I _{OUT} ≤750mA	-	4	120	
Output Voltage		V _{OUT}	Fig.1	-27V ≤V _{IN} ≤-15.5V 5mA ≤I _{OUT} ≤1.0A		-12.6	-12	-11.4	V
Quiescent Current		I _B	Fig.1	T _j =25℃		-	3	6	mA
Quiescent Current Change	Line	ΔI _{BI}	Fig.1	-30V ≤V _{IN} ≤-15V		-	0.1	1.0	mA
	Load	ΔI _{BO}		5mA ≤I _{OUT} ≤1.0A		-	0.05	0.5	
Output Noise Voltage		V _{NO}	Fig.2	Ta=25℃, 10Hz≤f≤100kHz		-	200	-	μV _{rms}
Ripple Rejection Ratio		RR	Fig.3	f=120Hz, I _{OUT} =20mA,		54	60	-	dB
Short Circuit Current Limit		I _{SC}	Fig.1	T _j =25℃		-	1.9	-	A
Average Temperature Coefficient of Output Voltage		T _{CV0}	Fig.1	I _{OUT} =5mA		-	-0.8	-	mV/℃
Dropout Voltage		V _D	Fig.1	T _j =25℃, I _{OUT} =1A		-	2.0	-	V

KIA7905P~KIA7924P

ELECTRICAL CHARACTERISTICS

KIA7915P

(Unless otherwise specified, $V_{IN}=-23V$, $I_{OUT}=500mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{IN}=2.2\mu F$, $C_{OUT}=1\mu F$)

CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage		V_{OUT}	Fig.1	$T_j=25^{\circ}C$		-15.6	-15	-14.4	V
Input Regulation		Reg line	Fig.1	$T_j=25^{\circ}C$	$-26V \leq V_{IN} \leq -20V$	-	6	150	mV
					$-30V \leq V_{IN} \leq -17.5V$	-	12	300	
Load Regulation		Reg load	Fig.1	$T_j=25^{\circ}C$	$5mA \leq I_{OUT} \leq 1.5A$	-	12	300	mV
					$250mA \leq I_{OUT} \leq 750mA$	-	4	150	
Output Voltage		V_{OUT}	Fig.1	$-30V \leq V_{IN} \leq -18V$ $5mA \leq I_{OUT} \leq 1.0A$		-15.75	-15	-14.25	V
Quiescent Current		I_B	Fig.1	$T_j=25^{\circ}C$		-	3	6	mA
Quiescent Current Change	Line	ΔI_{BI}	Fig.1	$-30V \leq V_{IN} \leq -17.5V$		-	0.1	1.0	mA
	Load	ΔI_{BO}		$5mA \leq I_{OUT} \leq 1.0A$		-	0.05	0.5	
Output Noise Voltage		V_{NO}	Fig.2	$T_a=25^{\circ}C$, $10Hz \leq f \leq 100kHz$		-	250	-	μV_{rms}
Ripple Rejection Ratio		RR	Fig.3	$f=120Hz$, $I_{OUT}=20mA$,		54	60	-	dB
Short Circuit Current Limit		I_{SC}	Fig.1	$T_j=25^{\circ}C$		-	1.9	-	A
Average Temperature Coefficient of Output Voltage		T_{CVO}	Fig.1	$I_{OUT}=5mA$		-	-0.9	-	mV/ $^{\circ}C$
Dropout Voltage		V_D	Fig.1	$T_j=25^{\circ}C$, $I_{OUT}=1A$		-	2.0	-	V

KIA7905P~KIA7924P

ELECTRICAL CHARACTERISTICS

KIA7918P

(Unless otherwise specified, $V_{IN}=-27V$, $I_{OUT}=500mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{IN}=2.2\mu F$, $C_{OUT}=1\mu F$)

CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage		V _{OUT}	Fig.1	T _j =25 ℃		-18.7	-18	-17.3	V
Input Regulation		Reg line	Fig.1	T _j =25 ℃	-30V ≤V _{IN} ≤-24V	-	8	180	mV
					-33V ≤V _{IN} ≤-21V	-	15	360	
Load Regulation		Reg load	Fig.1	T _j =25 ℃	5mA ≤I _{OUT} ≤1.5A	-	15	360	mV
					250mA ≤I _{OUT} ≤750mA	-	5	180	
Output Voltage		V _{OUT}	Fig.1	-33V ≤V _{IN} ≤-22.5V 5mA ≤I _{OUT} ≤1.0A		-18.85	-18	-17.15	V
Quiescent Current		I _B	Fig.1	T _j =25 ℃		-	3	6	mA
Quiescent Current Change	Line	ΔI _{BI}	Fig.1	-33V ≤V _{IN} ≤-22V		-	-	1.0	mA
	Load	ΔI _{BO}		5mA ≤I _{OUT} ≤1.0A		-	-	0.5	
Output Noise Voltage		V _{NO}	Fig.2	Ta=25 ℃, 10Hz ≤f ≤100kHz		-	300	-	μV _{rms}
Ripple Rejection Ratio		RR	Fig.3	f=120Hz, I _{OUT} =20mA,		54	60	-	dB
Short Circuit Current Limit		I _{SC}	Fig.1	T _j =25 ℃		-	1.9	-	A
Average Temperature Coefficient of Output Voltage		T _{CVO}	Fig.1	I _{OUT} =5mA		-	-1.0	-	mV/ ℃
Dropout Voltage		V _D	Fig.1	T _j =25 ℃, I _{OUT} =1A		-	2.0	-	V

KIA7905P~KIA7924P

ELECTRICAL CHARACTERISTICS

KIA7920P

(Unless otherwise specified, $V_{IN}=-30V$, $I_{OUT}=500mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{IN}=2.2\mu F$, $C_{OUT}=1\mu F$)

CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage		V_{OUT}	Fig.1	$T_j=25^{\circ}C$		-20.8	-20	-19.2	V
Input Regulation		Reg line	Fig.1	$T_j=25^{\circ}C$	$-32V \leq V_{IN} \leq -26V$	-	10	180	mV
					$-35V \leq V_{IN} \leq -24V$	-	18	360	
Load Regulation		Reg load	Fig.1	$T_j=25^{\circ}C$	$5mA \leq I_{OUT} \leq 1.5A$	-	18	360	mV
					$250mA \leq I_{OUT} \leq 750mA$	-	10	180	
Output Voltage		V_{OUT}	Fig.1	$-35V \leq V_{IN} \leq -24V$ $5mA \leq I_{OUT} \leq 1.0A$		-21.0	-20	-19.0	V
Quiescent Current		I_B	Fig.1	$T_j=25^{\circ}C$		-	3	6	mA
Quiescent Current Change	Line	ΔI_{BI}	Fig.1	$-36.5V \leq V_{IN} \leq -25V$		-	-	1.0	mA
	Load	ΔI_{BO}		$5mA \leq I_{OUT} \leq 1.0A$		-	-	0.5	
Output Noise Voltage		V_{NO}	Fig.2	$T_a=25^{\circ}C$, $10Hz \leq f \leq 100kHz$		-	350	-	μV_{rms}
Ripple Rejection Ratio		RR	Fig.3	$f=120Hz$, $I_{OUT}=20mA$		54	60	-	dB
Short Circuit Current Limit		I_{SC}	Fig.1	$T_j=25^{\circ}C$		-	1.9	-	A
Average Temperature Coefficient of Output Voltage		T_{CVO}	Fig.1	$I_{OUT}=5mA$		-	-1.0	-	mV/ $^{\circ}C$
Dropout Voltage		V_D	Fig.1	$T_j=25^{\circ}C$, $I_{OUT}=1A$		-	2.0	-	V

KIA7905P~KIA7924P

ELECTRICAL CHARACTERISTICS

KIA7924P


(Unless otherwise specified, $V_{IN}=-33V$, $I_{OUT}=500mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$)

CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage		V _{OUT}	Fig.1	T _j =25 °C		-25	-24	-23	V
Input Regulation		Reg line	Fig.1	T _j =25 °C	-36V ≤V _{IN} ≤-30V	-	8	240	mV
					-38V ≤V _{IN} ≤-27V	-	15	480	
Load Regulation		Reg load	Fig.1	T _j =25 °C	5mA ≤I _{OUT} ≤1.5A	-	15	480	mV
					250mA ≤I _{OUT} ≤750mA	-	5	240	
Output Voltage		V _{OUT}	Fig.1	-38V ≤V _{IN} ≤-27V 5mA ≤I _{OUT} ≤1.0A		-25.2	-24	-22.5	V
Quiescent Current		I _B	Fig.1	T _j =25 °C		-	3	6	mA
Quiescent Current Change	Line	ΔI _{BI}	Fig.1	-38V ≤V _{IN} ≤-27V		-	-	1.0	mA
	Load	ΔI _{BO}		5mA ≤I _{OUT} ≤1.0A		-	-	0.5	
Output Noise Voltage		V _{NO}	Fig.2	Ta=25 °C, 10Hz≤f≤100kHz		-	400	-	μV _{rms}
Ripple Rejection Ratio		RR	Fig.3	f=120Hz, I _{OUT} =20mA,		54	60	-	dB
Short Circuit Current Limit		I _{SC}	Fig.1	T _j =25 °C		-	1.9	-	A
Average Temperature Coefficient of Output Voltage		T _{CV0}	Fig.1	I _{OUT} =5mA		-	-1.0	-	mV/ °C
Dropout Voltage		V _D	Fig.1	T _a =25 °C, I _{OUT} =1A		-	2.0	-	V

KIA7905P~KIA7924P

TEST CIRCUIT

Fig.1 Standard Test Circuit

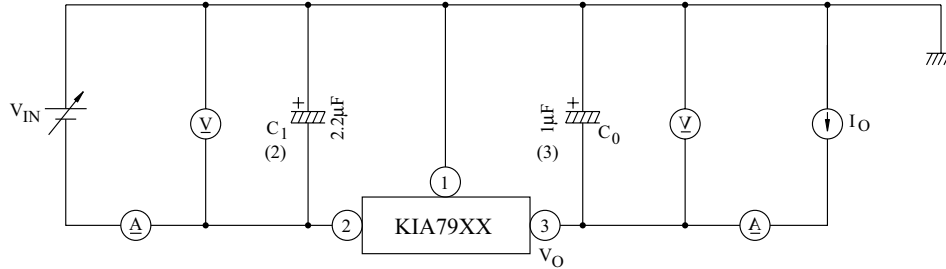

Notes : (1) To specify an output voltage, substitute voltage value for "XX"

(2) Required for stability. For value given, capacitor must be solid tantalum. If aluminium electrolytics are used, at least ten times value shown should be selected. C_1 is required if regulator is located an appreciable distance from power supply filter.

(3) To improve transient response. If large capacitors are used, a high current diode from input to output (1N4001 or similar) should be introduced to protect the device from momentary input short circuit.

Fig.2 V_{NO} Test Circuit


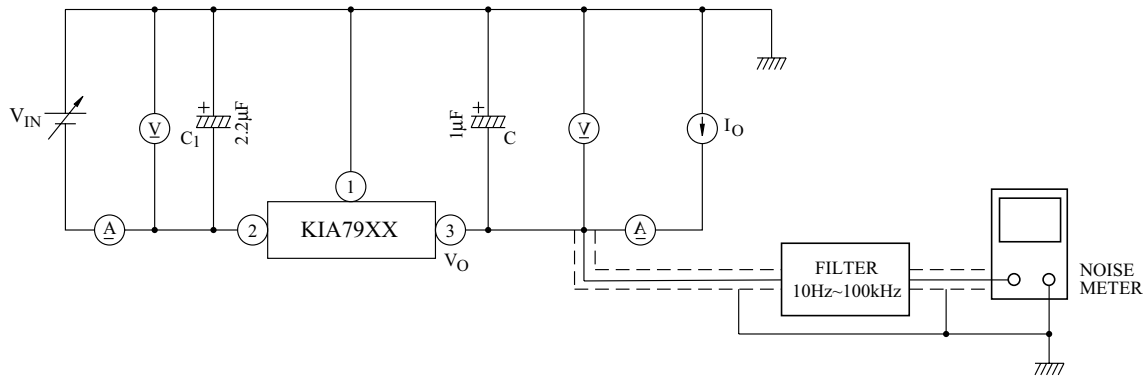


Fig.3 Ripple Rejection Test Circuit

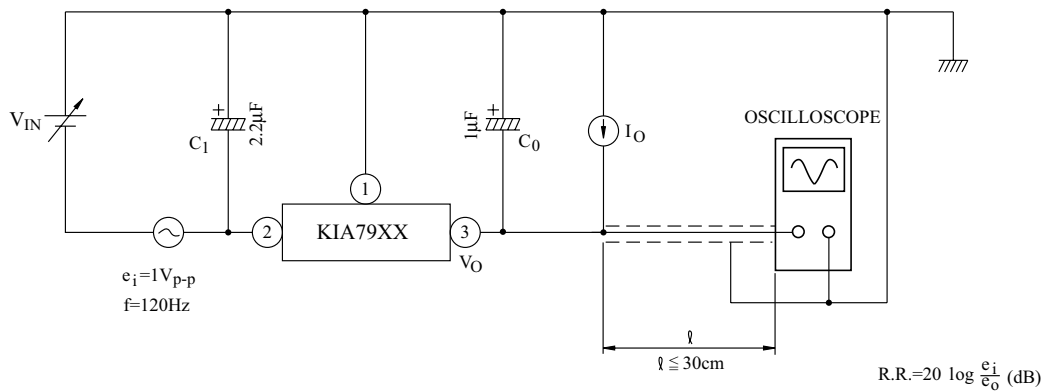

KIA7905P~KIA7924P

Fig. 4

$I_B - T_j$

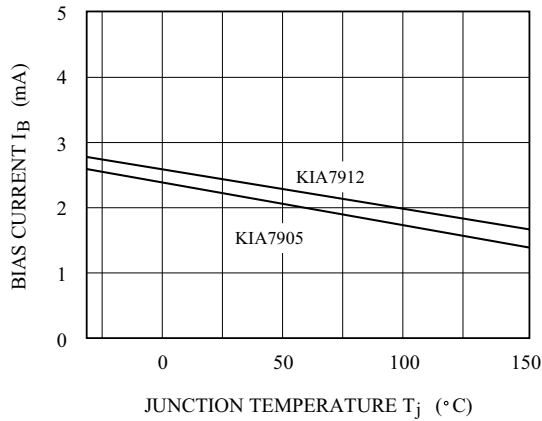


Fig. 5

$V_{OUT} - T_j$

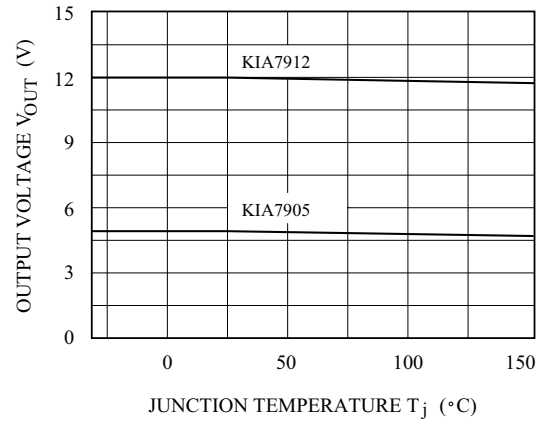


Fig. 6

$RR - I_{OUT}$

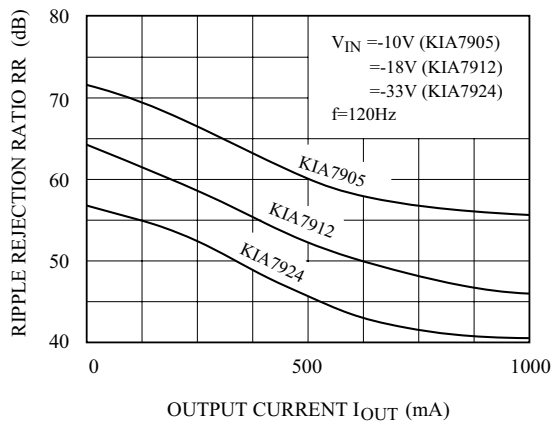


Fig. 7

$I_{SC} - V_{IN}$

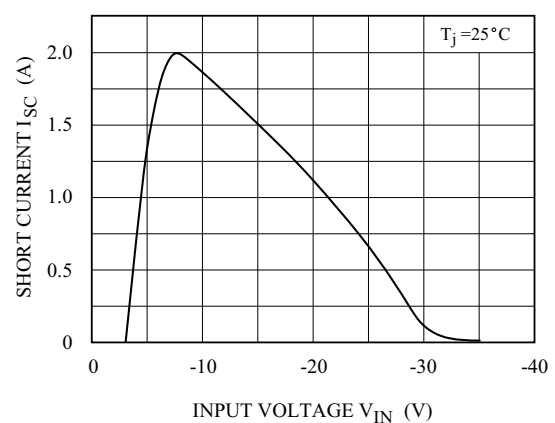


Fig. 8

$V_D - T_j$

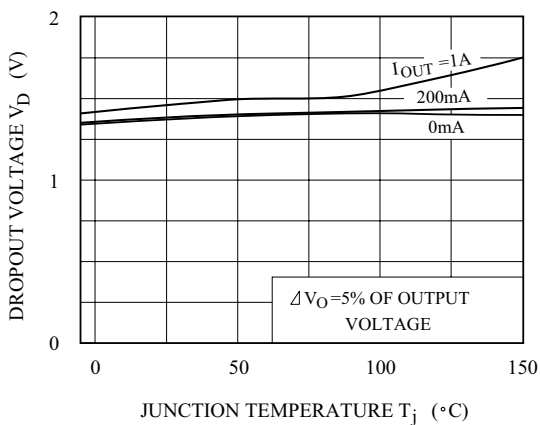


Fig. 9

$P_D - T_a$

