


HER101 - HER108

1.0AMP High Efficient Rectifiers

DO-41

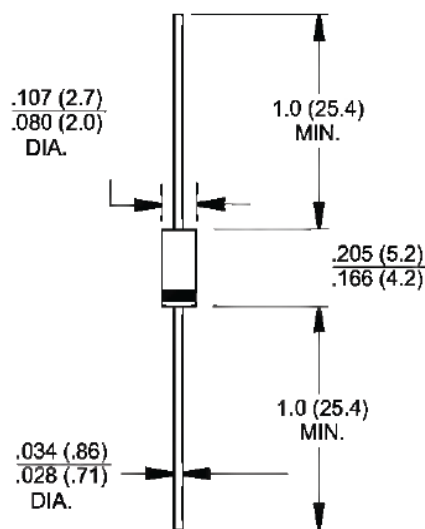

Features

- High efficiency, Low VF
- High current capability
- High reliability
- High surge current capability
- Low power loss
- Green compound with suffix "G" on packing code & prefix "G" on datecode

Mechanical Data

- Case: Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Pure tin plated, lead free, solderable per MIL-STD-202, Method 208 guaranteed
- Polarity: Color band denotes cathode
- High temperature soldering guaranteed: 260°C/10s
- .375", (9.5mm) lead lengths at 5 lbs, (2.3kg) tension
- Weight: 0.34 grams

Dimensions in inches and (millimeters)



Marking Diagram

- HER10X = Specific Device Code
G = Green Compound
Y = Year
WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbo l	HER 101	HER 102	HER 103	HER 104	HER 105	HER 106	HER 107	HER 108	Unit
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	300	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	210	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	300	400	600	800	1000	V
Maximum Average Forward Rectified Current .375 (9.5mm) Lead Length @ T _A =55°C	I _{F(AV)}	1								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	30								A
Maximum Instantaneous Forward Voltage (Note 1) @ 1 A	V _F	1.0				1.3	1.7			V
Maximum Reverse Current @ Rated VR T _A =25 °C T _A =125 °C	I _R	5 150								uA
Maximum Reverse Recovery Time (Note 2)	T _{rr}	50					75			nS
Typical Junction Capacitance (Note 3)	C _j	25					20			pF
Typical Thermal Resistance (Note 4)	R _{θJA} R _{θJC} R _{θJL}	70 15 25								°C/W
Operating Temperature Range	T _J	- 65 to + 150								°C
Storage Temperature Range	T _{STG}	- 65 to + 150								°C

Note 1: Pulse Test with PW=300 usec, 1% Duty Cycle

Note 2: Reverse Recovery Test Conditions: IF=0.5A, IR=1.0A, IRR=0.25A

Note 3: Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.

Note 4: Mount on Cu-Pad Size 16mm x 16mm on PCB

RATINGS AND CHARACTERISTIC CURVES (HER101 THRU HER108)

FIG.1 FORWARD CURRENT DERATING CURVE

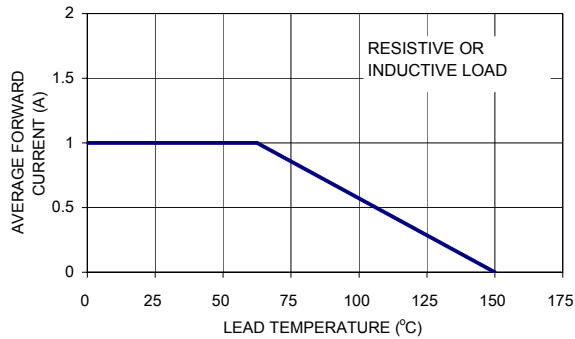


FIG. 2 TYPICAL REVERSE CHARACTERISTICS

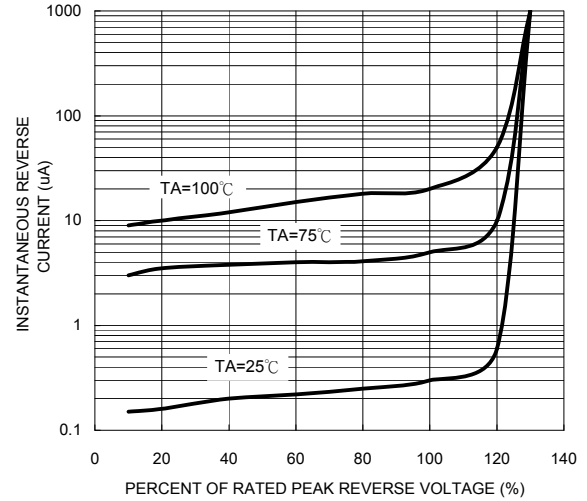


FIG. 3 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

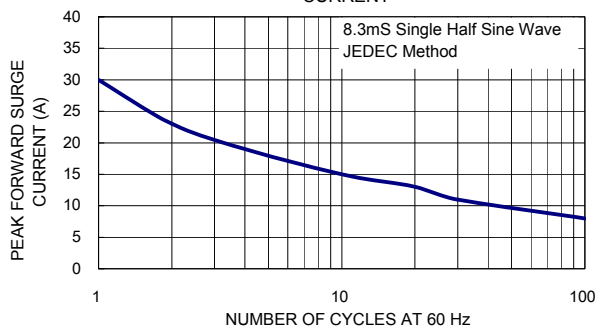


FIG. 5 TYPICAL FORWARD CHARACTERISRICS

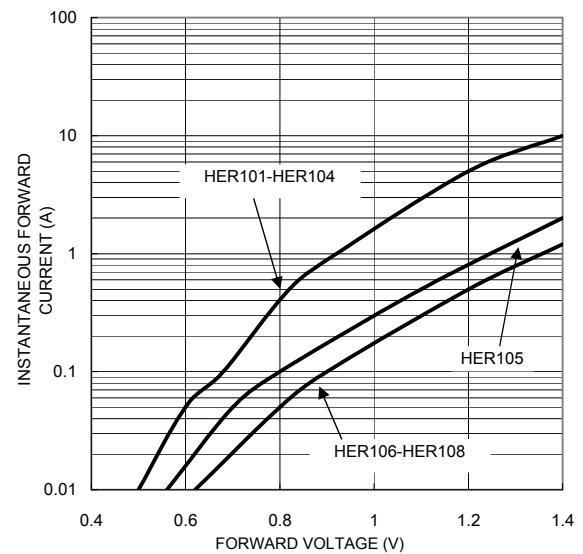


FIG. 4 TYPICAL JUNCTION CAPACITANCE


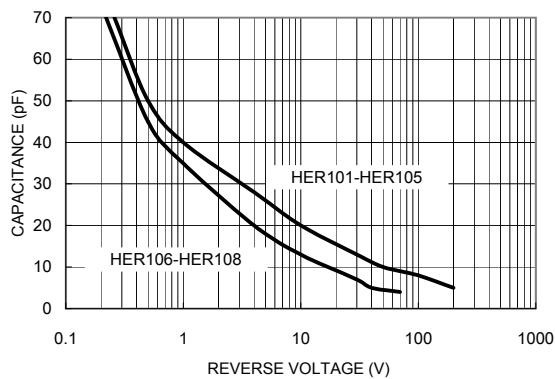


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

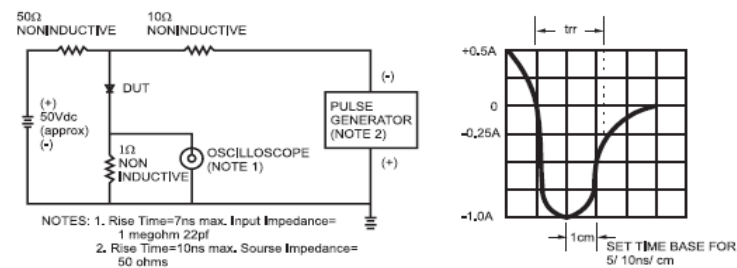

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Taiwan Semiconductor:](#)

[HER101](#) [HER102](#) [HER103](#) [HER104](#) [HER105](#) [HER107](#) [HER108](#) [HER106](#)