



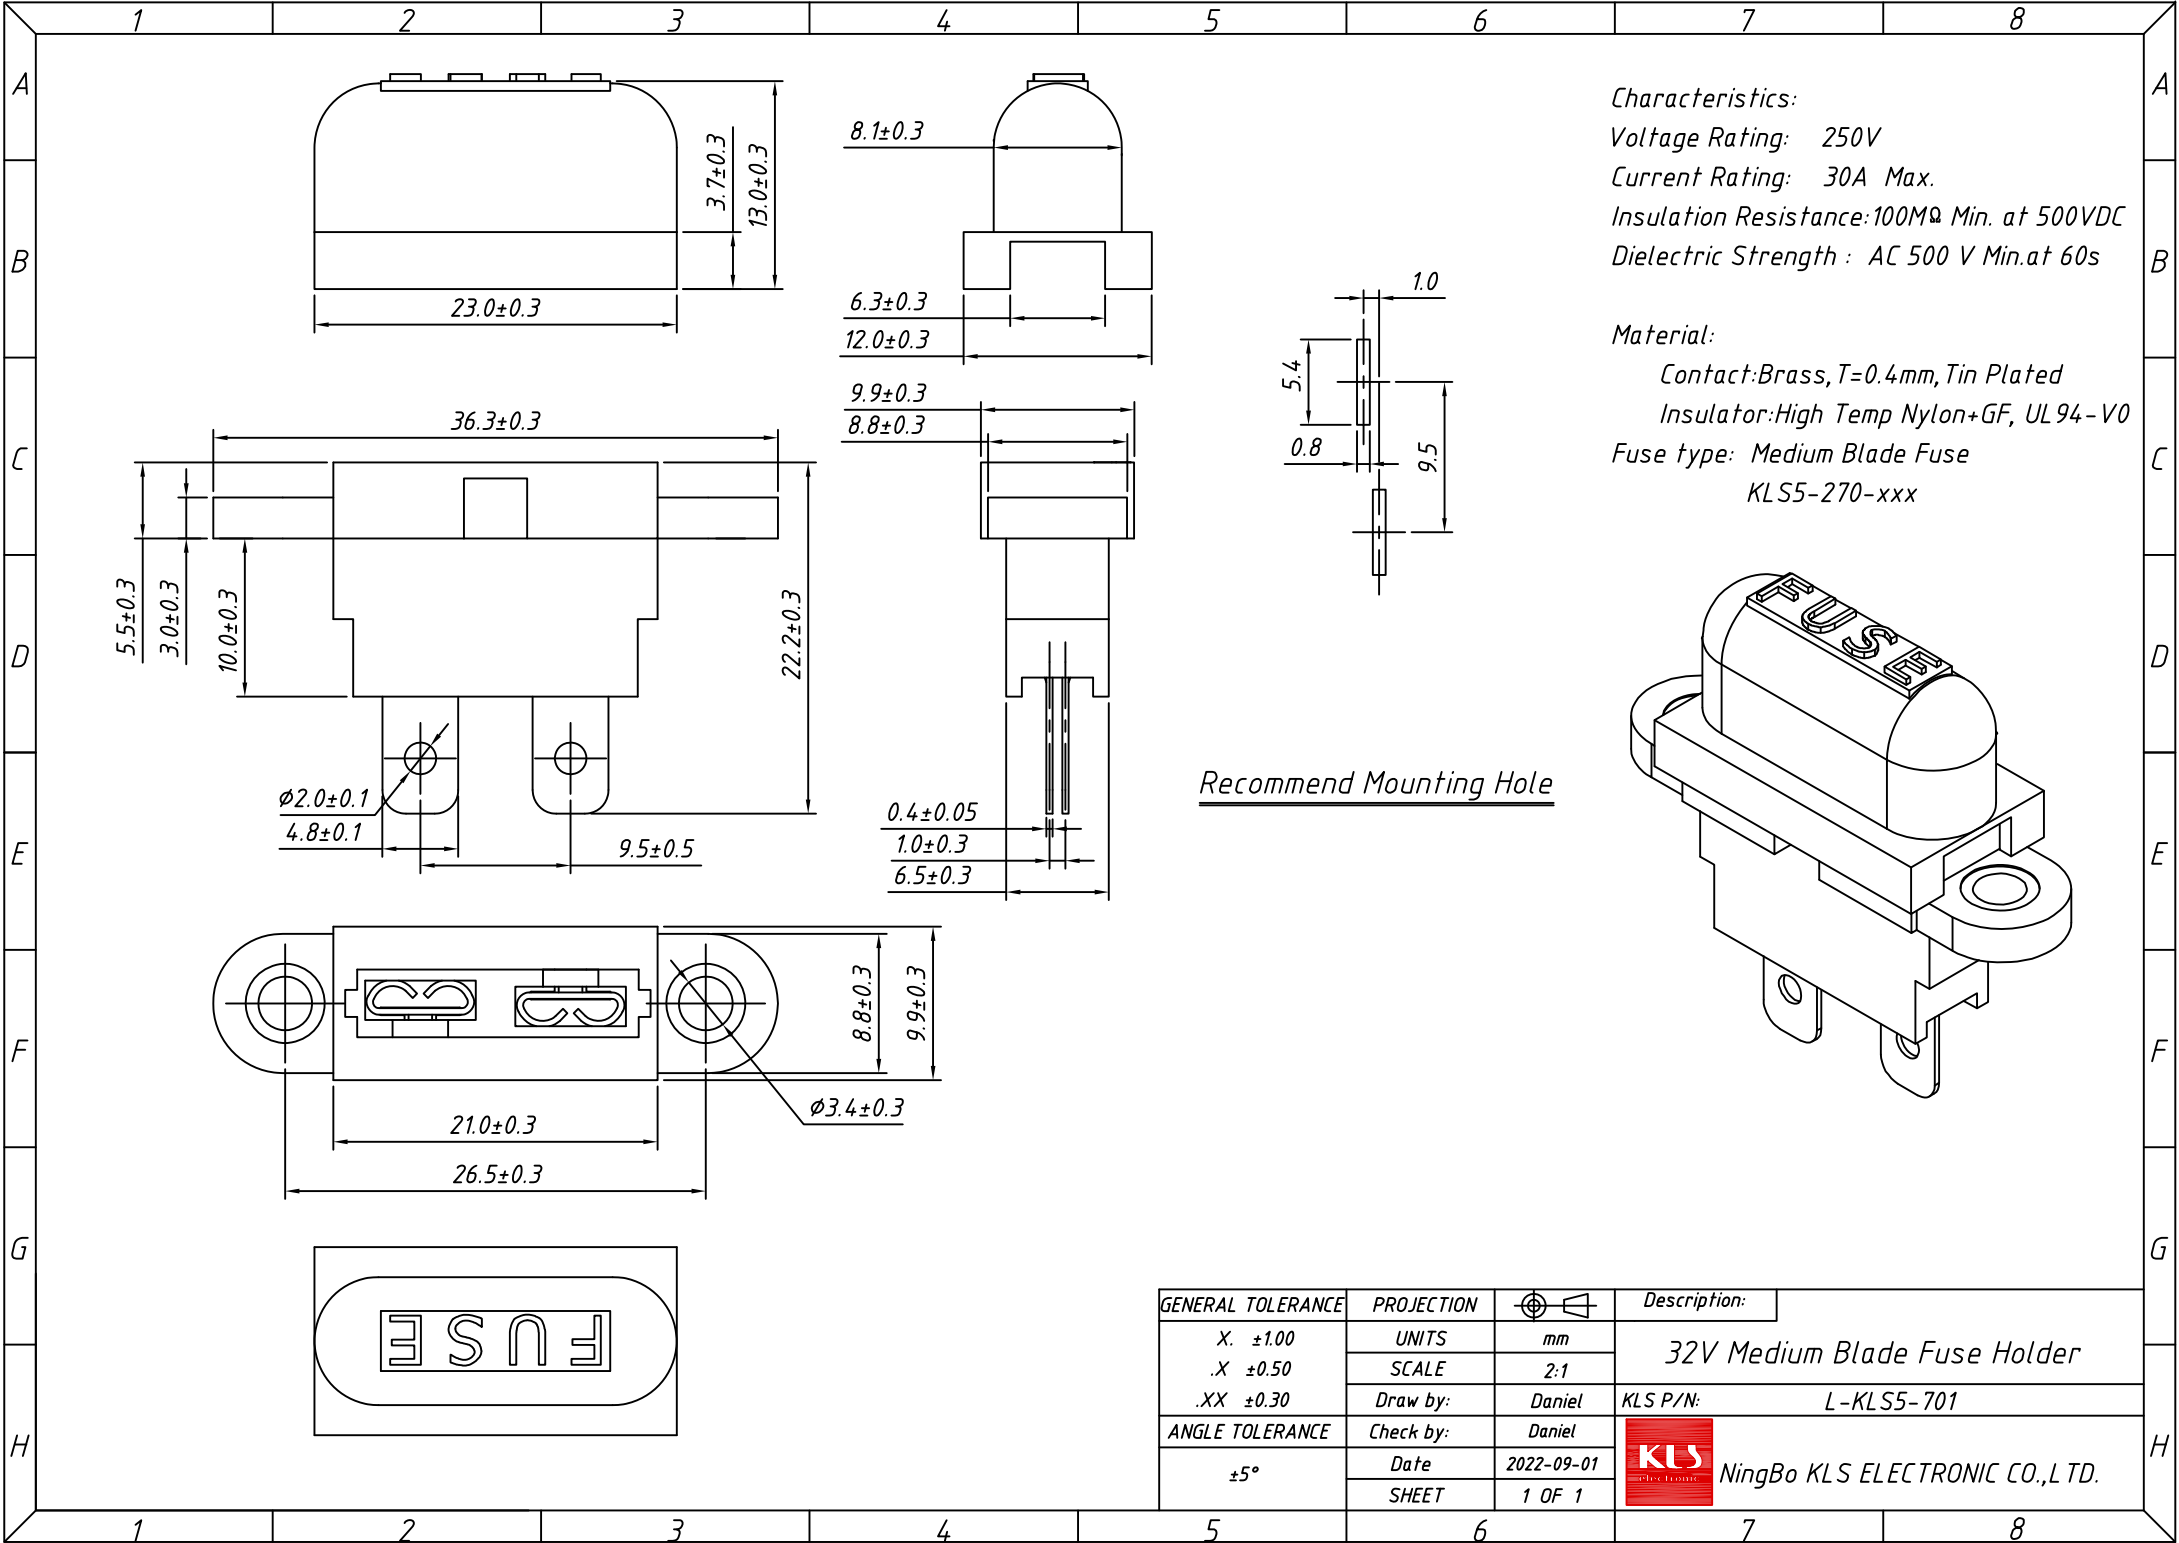

Characteristics:
Voltage Rating: 250V
Current Rating: 30A Max.
Insulation Resistance: 100MΩ Min. at 500VDC
Dielectric Strength: AC 500 V Min. at 60s

Material:
Contact: Brass, T=0.4mm, Tin Plated
Insulator: High Temp Nylon+GF, UL 94-V0
Fuse type: Medium Blade Fuse
KLS5-270-xxx

Recommend Mounting Hole

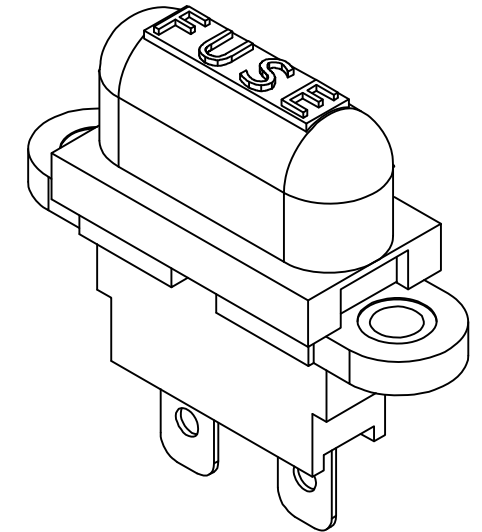

GENERAL TOLERANCE	PROJECTION		Description:
X. ±1.00	UNITS	mm	32V Medium Blade Fuse Holder
.X ±0.50	SCALE	2:1	
.XX ±0.30	Draw by:	Daniel	
ANGLE TOLERANCE	Check by:	Daniel	KLS P/N: L-KLS5-701
±5°	Date	2022-09-01	 NingBo KLS ELECTRONIC CO.,L TD.
	SHEET	1 OF 1	