


DUAL OPERATIONAL AMPLIFIER

■ DESCRIPTION

The UTC **LM358** consists of two independent high gain, internally frequency compensated operational amplifier. It can be operated from a single power supply and also split power supplies.

■ FEATURES

- *Internally frequency compensated for unity gain.
- *Wide power supply range 3V - 32V.
- *Input common-mode voltage range include ground.
- *Large DC voltage gain.

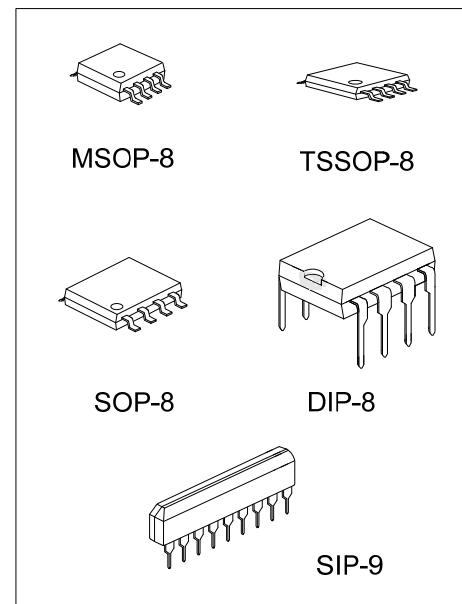



Lead-free: LM358L

Halogen-free: LM358G


LM358

LINEAR INTEGRATED CIRCUIT

■ PIN DESCRIPTION

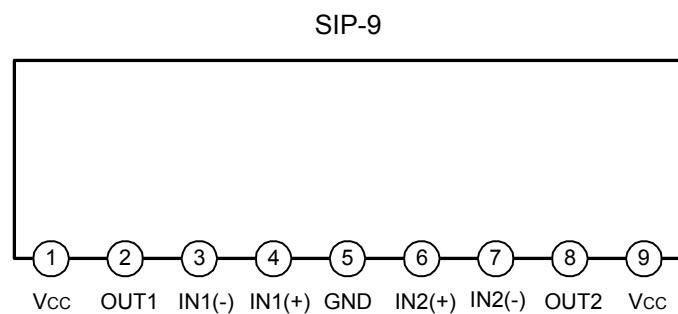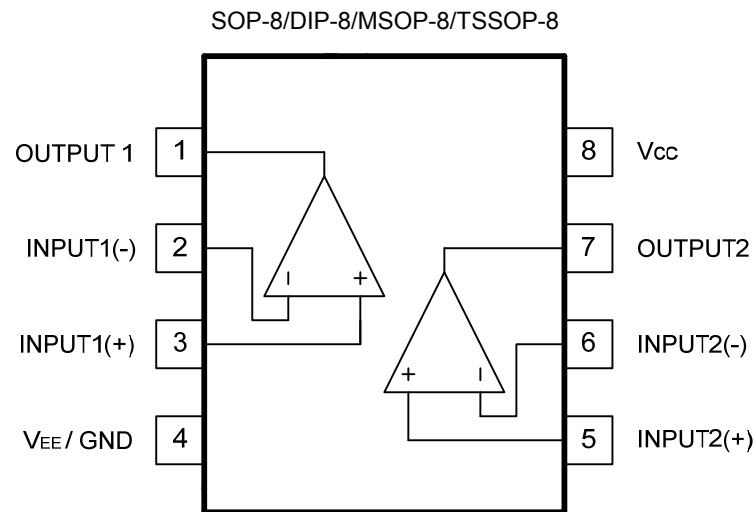

■ BLOCK DIAGRAM

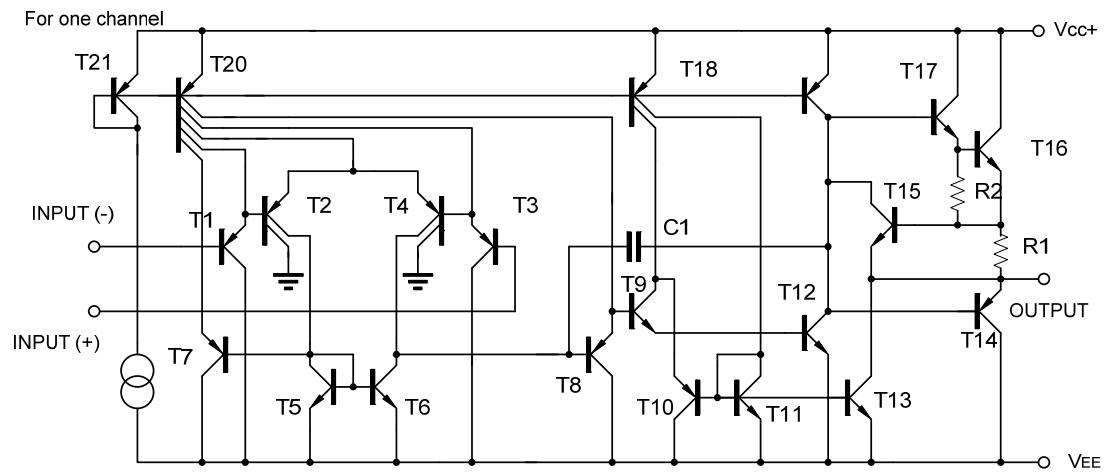

LM358

LINEAR INTEGRATED CIRCUIT

■ ABSOLUTE MAXIMUM RATINGS







PARAMETER		SYMBOL	RATINGS	UNIT
Supply Voltage		V _{CC}	±16 or 32	V
Differential Input Voltage		V _{I(DIFF)}	±32	V
Input Voltage		V _I	-0.3 ~ +32	V
Output Short to Ground			Continuous	
Power Dissipation	SIP-9	P _D	600	mW
	DIP-8		500	
	SOP-8		280	
	TSSOP-8/MSOP-8		200	
Junction Temperature		T _J	+125	°C
Operating Temperature		T _{OPR}	-40 ~ +85	°C
Storage Temperature		T _{STG}	-65 ~ +150	°C

Note Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (V_{CC}=5.0V, V_{EE}=GND, Ta=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Offset Voltage	V _{I(OFF)}	V _{CM} =0V to V _{CC} -1.5V V _{O(P)} =1.4V, R _S =0Ω		2.9	7.0	mV
Input Common Mode Voltage	V _{I(CM)}	V _{CC} =30V	0		V _{CC} -1.5	V
Differential Input Voltage	V _{I(DIFF)}				V _{CC}	V
Output Voltage Swing	V _{OH}	V _{CC} =30V, R _L =2KΩ	26			V
		V _{CC} =30V, R _L =10KΩ	27	28		V
Large Signal Voltage Gain	G _V	V _{CC} =5V, R _L ≥10KΩ		5	20	mV
		V _{CC} =15V, R _L ≥2KΩ V _{O(P)} =1V ~ 11V	25	100		V/mV
Power Supply Current	I _{CC}	R _L =∞, V _{CC} =30V		0.8	2.0	mA
		R _L =∞, Full Temperature Range		0.5	1.2	mA
Input Offset Current	I _{I(OFF)}			5	50	nA
Input Bias Current	I _{I(BIAS)}			45	250	nA
Short Circuit Current to Ground	I _{SC}			40	60	mA
Output Current	I _{SOURCE}	V _{I(+)} =1V, V _{I(-)} =0V V _{CC} =15V, V _{O(P)} =2V	10	30		mA
	I _{SINK}	V _{I(+)} =0V, V _{I(-)} =1V V _{CC} =15V, V _{O(P)} =2V	10	15		mA
		V _{I(+)} =0V, V _{I(-)} =1V V _{CC} =15V, V _{O(P)} =200mV	12	100		μA
Common Mode Rejection Ratio	CMRR		65	80		dB
Power Supply Rejection Ratio	PSRR		65	100		dB
Channel Separation	CS	f=1KHZ ~ 20KHZ		120		dB

■ TYPICAL CHARACTERISTICS

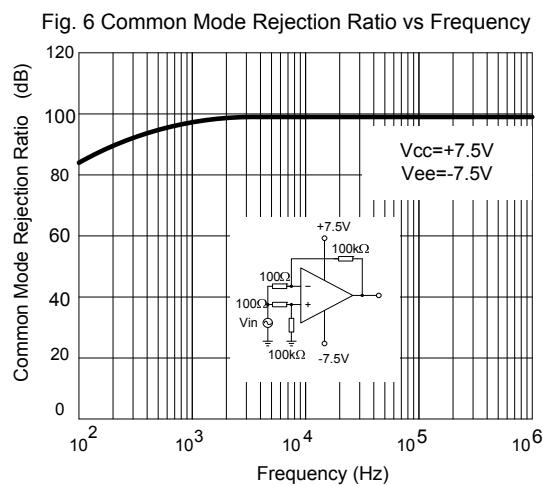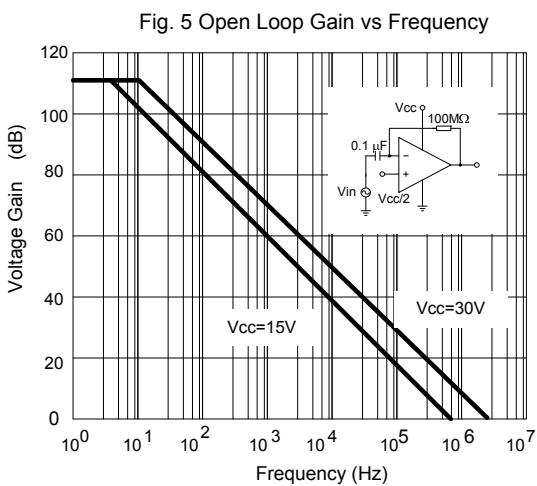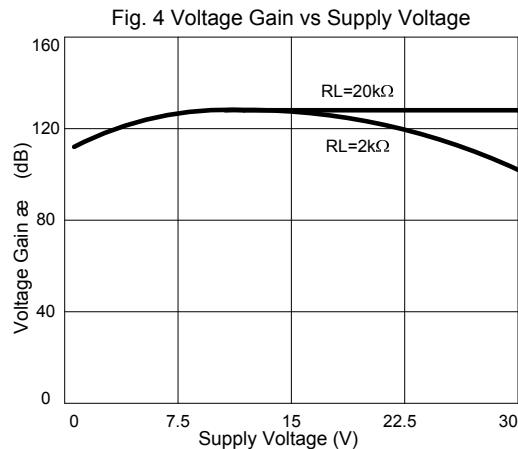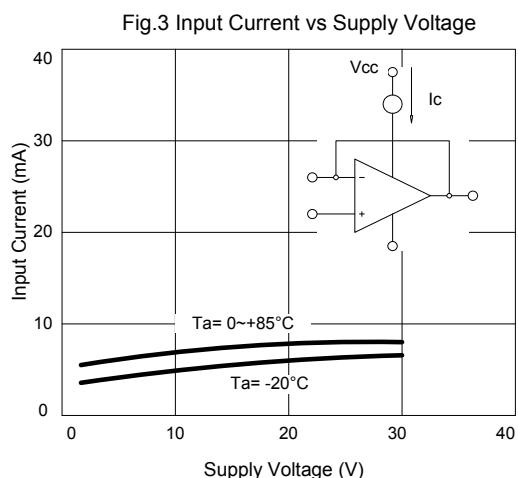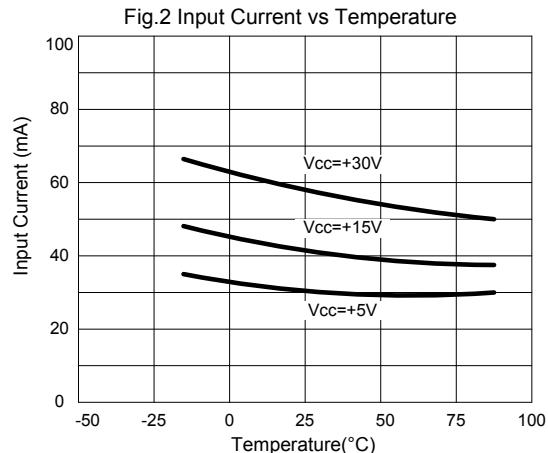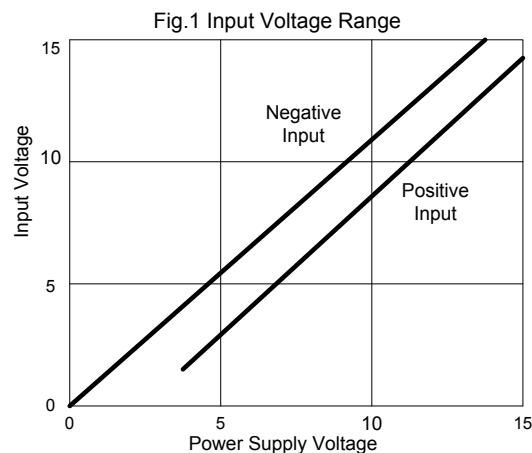

■ TYPICAL CHARACTERISTICS(Cont.)

Fig. 7 Voltage Follower Pulse Response

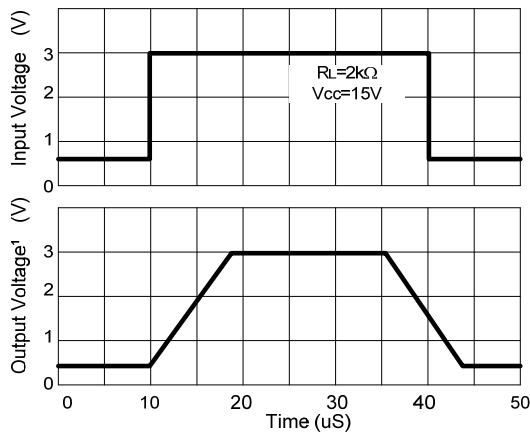


Fig. 8 Voltage Follower Response (Small Signal)

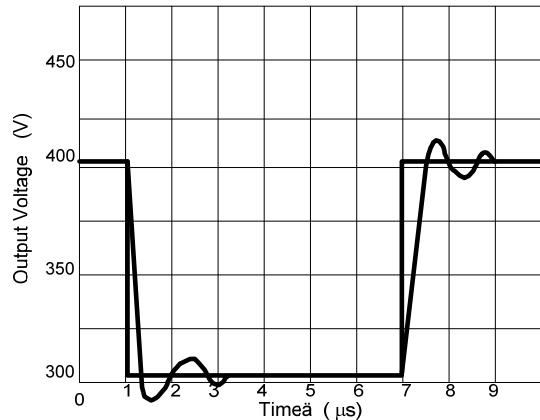


Fig. 9 Gain vs Large Signal Frequency

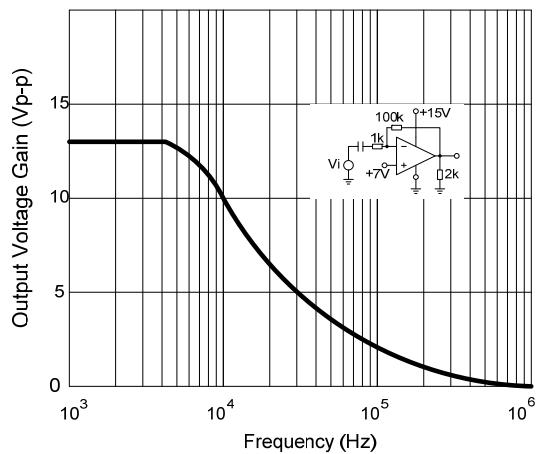


Fig. 10 Output Current Sinking vs Output Voltage

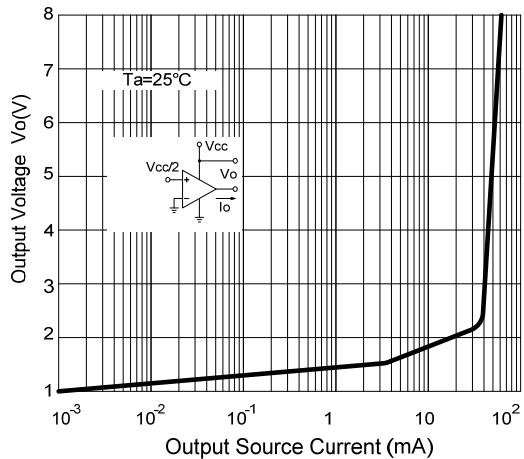


Fig. 11 Output Sink Current vs Output Voltage

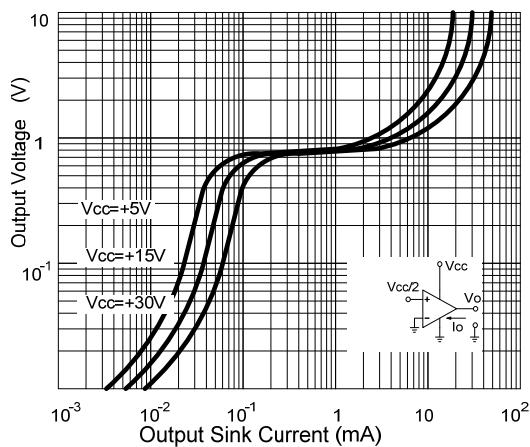


Fig. 12 Current Limiting vs Temperature

