

Female Header Series

KLS1-208B Female Header 2.00mm(0.079 ") Type

Electrical Characteristics:







Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
 Contacts: Phosphor Bronze
 Plating: Gold plated: 0.8u" over 50u" nickel

Features:

- * Available in both straight and right angle.
- * NOW available in surface mount.
- * Tuning fork contacts offer lower cost for competitive market.

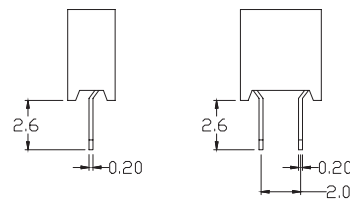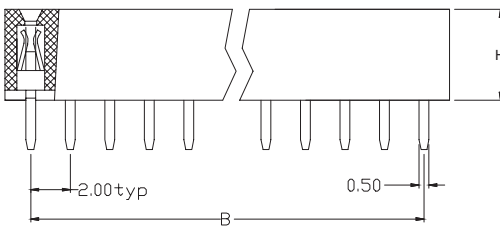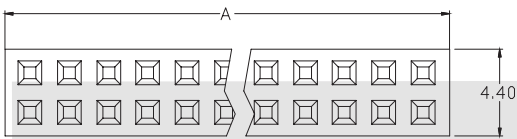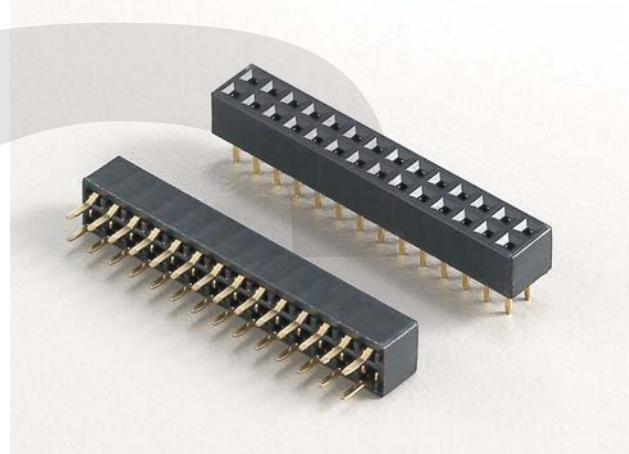

P. C. B Layout

Position	2 Thru 80
Dimension	
A 0.20	2.00 X No. of Positions+0.4
B 0.15	2.00 X No. of Positions-2.00

ORDER INFORMATION

Product No.: KLS1-208B-4.6-1-XX-S

Pos. No. _____ Tail Style: S=Straight Pin
 Female Header 2.00mm Type _____ R=Right Pin T=SMT Pin
 Height: 4.0mm, 4.3mm, 4.6mm _____ Total pin number: XX=02-80Pin
 _____ 1=Single layer 2=Double layer

Connector

Female Header Series

KLS1-208B Female Header 2.00mm(0.079 ") Type

Electrical Characteristics:



Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
 Contacts: Phosphor Bronze
 Plating: Gold plated: 0.8u" over 50u" nickel

Features:

- * Available in both straight and right angle.
- * NOW available in surface mount.
- * Tuning fork contacts offer lower cost for competitive market.

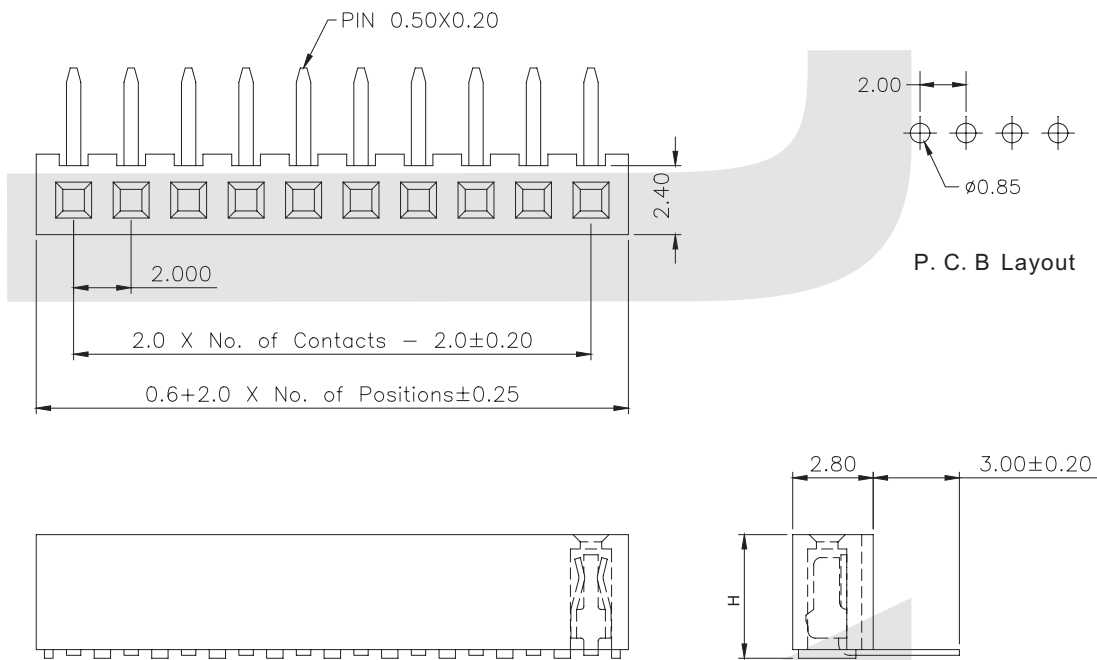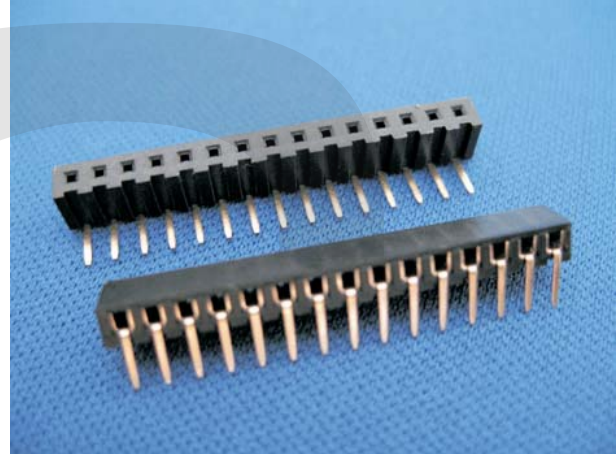

ORDER INFORMATION

Product No.: KLS1-208B-4.6-1-XX-R

Pos. No. _____	Tail Style: S=Straight Pin
Female Header 2.00mm Type _____	R=Right Pin T=SMT Pin
Height: 4.0mm, 4.3mm, 4.6mm _____	Total pin number: XX=01-40Pin
	1=Single layer 2=Double layer

Female Header Series

KLS1-208B Female Header 2.00mm(0.079") Type

Electrical Characteristics:




Current Rating: 1 AMP
Insulator Resistance: 5000MΩmin. at DC 500V
Contact Resistance: 20mΩmax. at DC 100mA
Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Plating: Gold plated: 0.8u" over 50u" nickel

Features:

- * Available in both straight and right angle.
- * NOW available in surface mount.
- * Tuning fork contacts offer lower cost for competitive market.

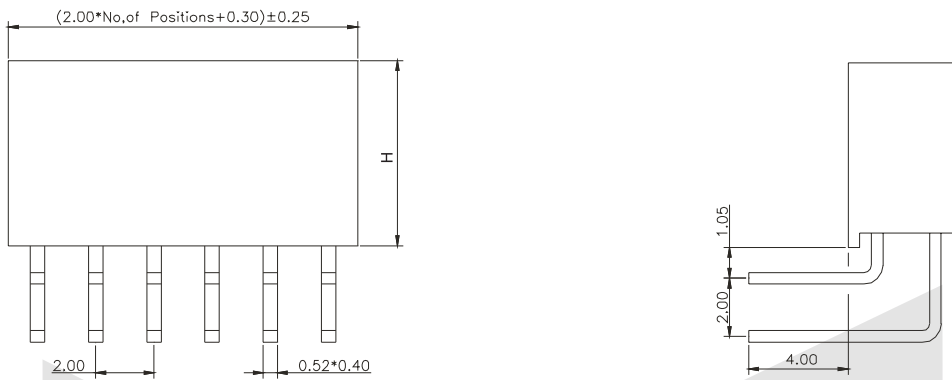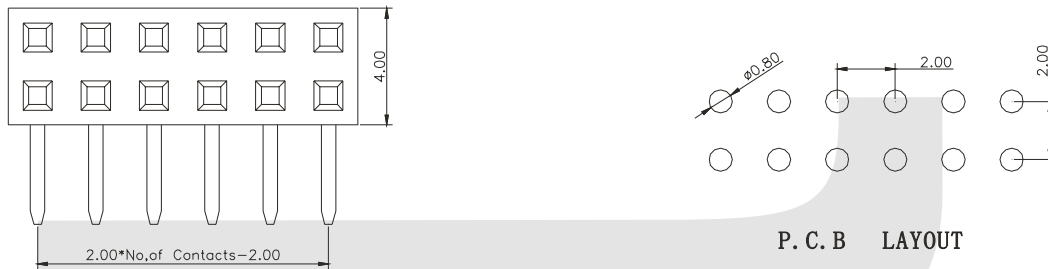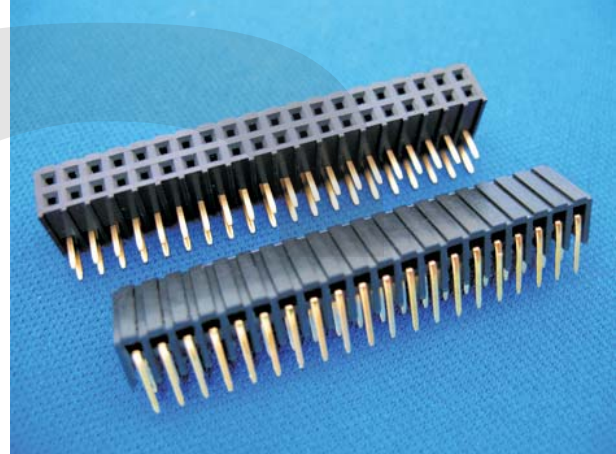

ORDER INFORMATION

Product No.: KLS1-208B-4.6-2-XX-R

Pos. No. _____	Tail Style: S=Straight Pin R=Right Pin T=SMT Pin
Female Header 2.00mm Type _____	Total pin number: XX=02-80Pin
Height: 4.0mm, 4.3mm, 4.6mm _____	1=Single layer 2=Double layer

Female Header Series

KLS1-208B Female Header 2.00mm(0.079") Type

Electrical Characteristics:



Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
 Contacts: Phosphor Bronze
 Plating: Gold plated: 0.8u" over 50u" nickel

Features:

- * Available in both straight and right angle.
- * NOW available in surface mount.
- * Tuning fork contacts offer lower cost for competitive market.

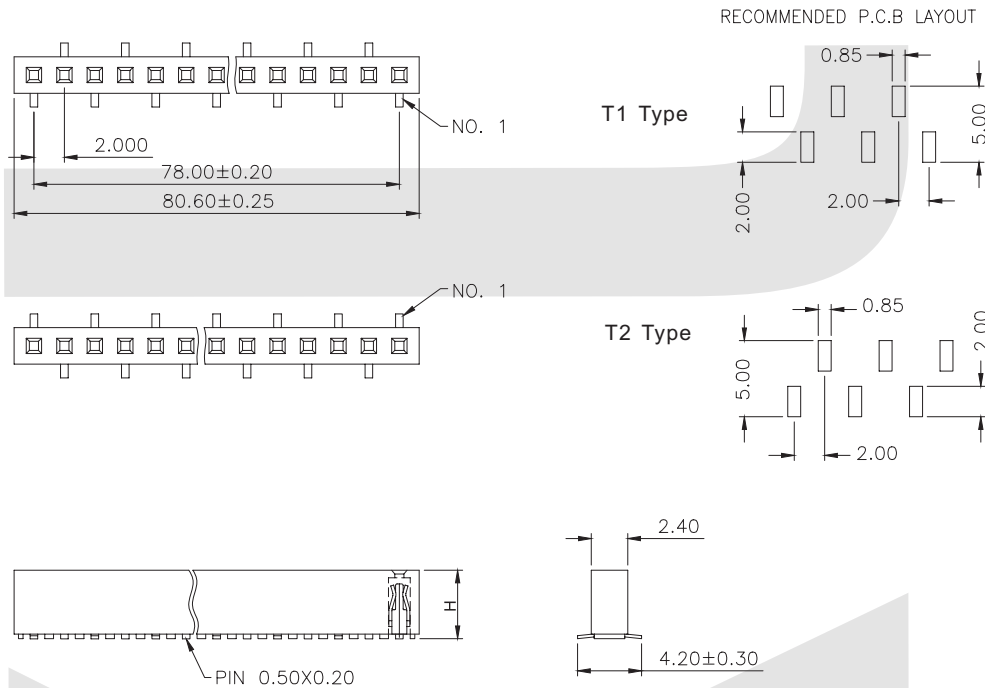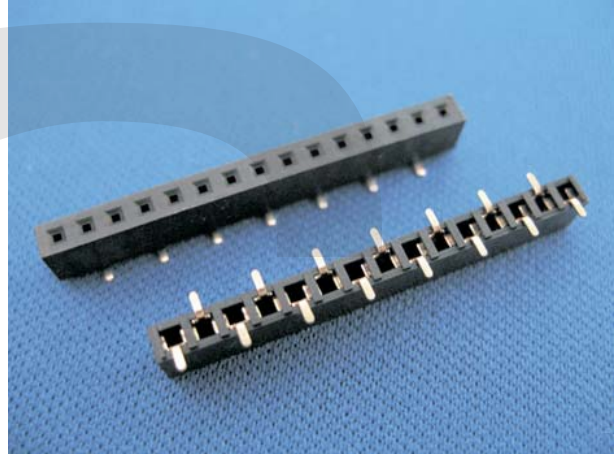

ORDER INFORMATION

Product No.: KLS1-208B-4.6-1-XX-T 1

Pos. No.	_____	SMT Pin Type	_____
Female Header 2.00mm Type	_____	Tail Style: S=Straight Pin	_____
Height: 4.0mm, 4.3mm, 4.6mm	_____	R=Right Pin T=SMT Pin	_____
		Total pin number: XX=01-40Pin	_____
		1=Single layer 2=Double layer	_____

Female Header Series

KLS1-208B Female Header 2.00mm(0.079 ") Type

Electrical Characteristics:



Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
 Contacts: Phosphor Bronze
 Plating: Gold plated: 0.8u" over 50u" nickel

Features:

- * Available in both straight and right angle.
- * NOW available in surface mount.
- * Tuning fork contacts offer lower cost for competitive market.

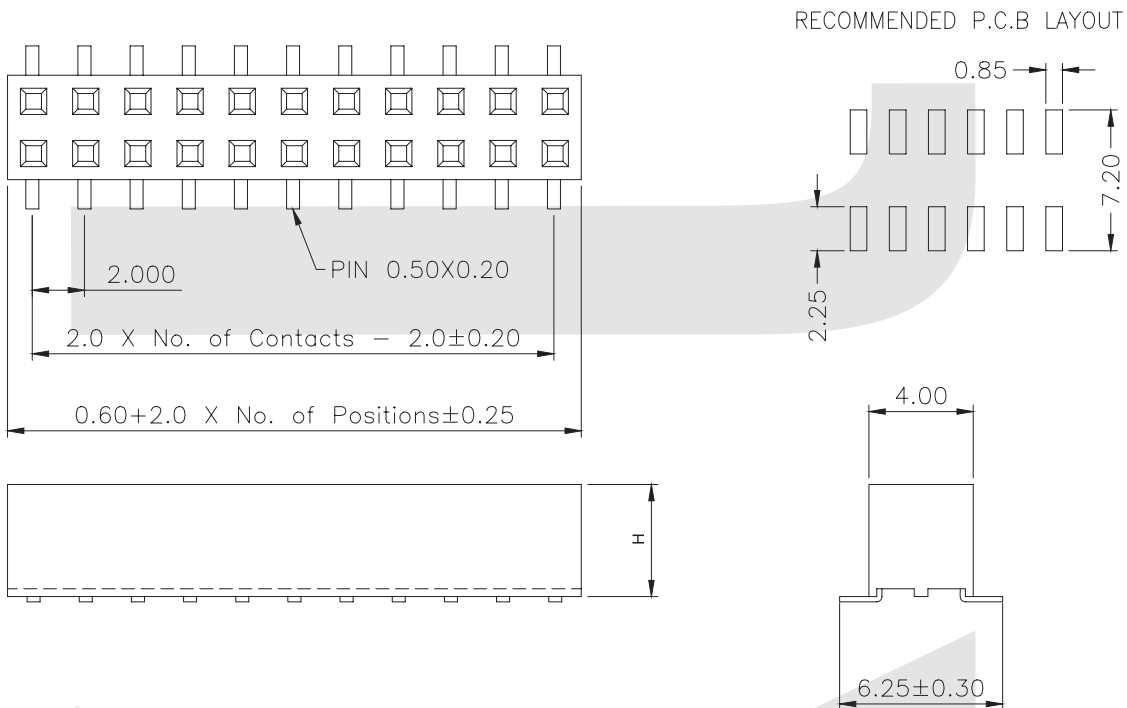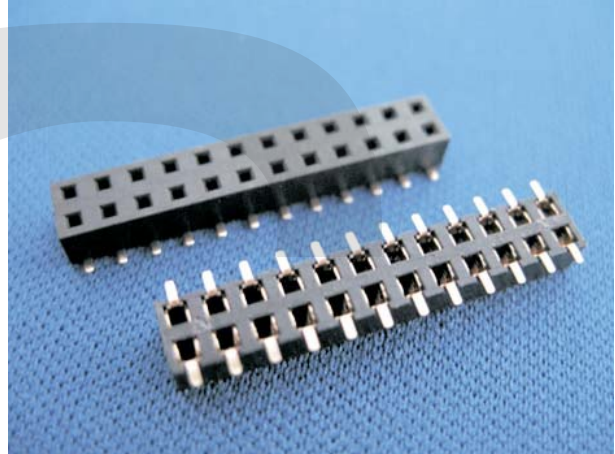

ORDER INFORMATION

Product No.: KLS1-208B-4.6-1-XX-T

Pos. No. _____	Tail Style: S=Straight Pin R=Right Pin T=SMT Pin
Female Header 2.00mm Type _____	Total pin number: XX=02-80Pin
Height: 4.0mm、4.3mm、4.6mm _____	1=Single layer 2=Double layer

Female Header Series

KLS1-208B Female Header 2.00mm(0.079") Type

Electrical Characteristics:





Current Rating: 1 AMP
Insulator Resistance: 5000MΩmin. at DC 500V
Contact Resistance: 20mΩmax. at DC 100mA
Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Plating: Gold plated: 0.8u" over 50u" nickel

Features:

- * Available in both straight and right angle.
- * NOW available in surface mount.
- * Tuning fork contacts offer lower cost for competitive market.

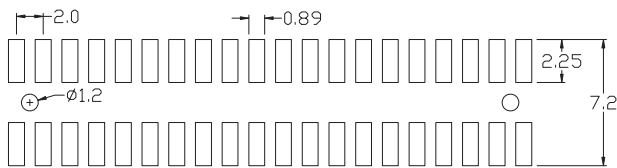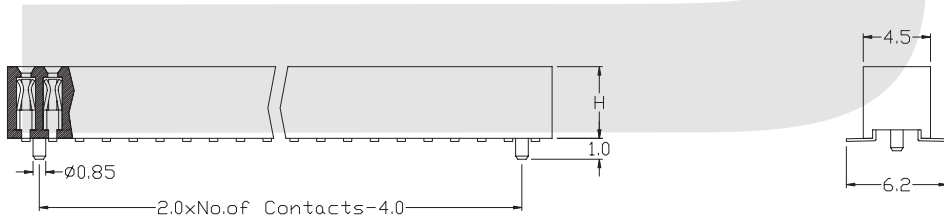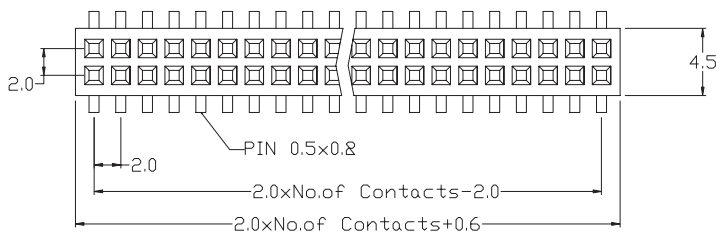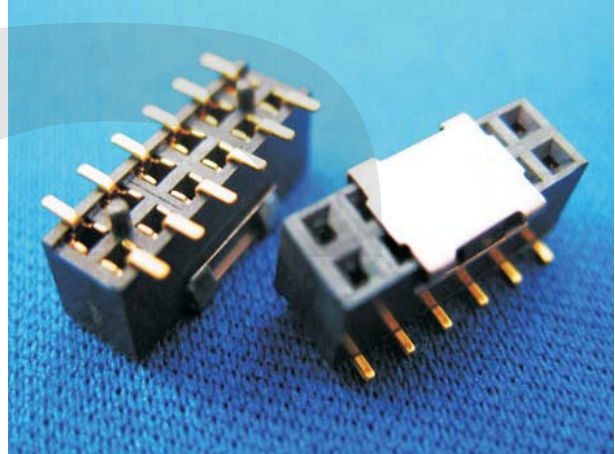

PCB Layout

ORDER INFORMATION

Product No.: KLS1-208B-4.6-2-XX-T3

Pos. No. _____	Tail Style: S=Straight Pin R=Right Pin T=SMT Pin
Female Header 2.00mm Type _____	Total pin number: XX=02-80Pin
Height: 4.0mm, 4.3mm, 4.6mm _____	2=Double layer