

# DECE33J222ZC4B

“ # ” indicates a package specification code.

Recommended


Available

Flow OK

Complies with RoHS

< List of part numbers with package codes >  
DECE33J222ZC4B

### Shape

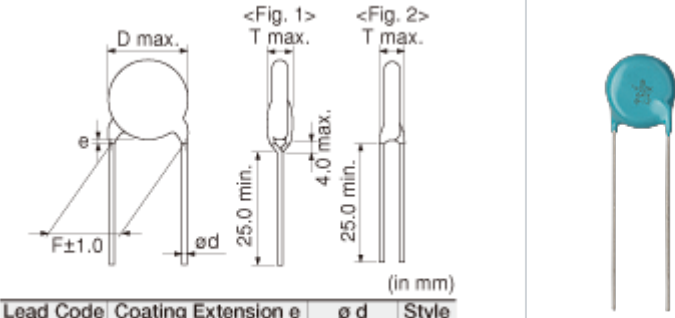

Lead Code	Coating Extension e	ø d	Style
A3	Up to the end of crimp	0.6±0.05	Fig. 1
C4	3.0 max.	0.6±0.05	Fig. 2

L size or outer diameter D (mm)

15.0 mm max.

T size

7.0 mm max.

Lead spacing F

10.0 ± 1.0mm

Lead diameter d

0.6 ± 0.05mm

Paint dripping e

3.0mm max.

### References

Packaging	Specifications	Minimum quantity
B	Packing in bulk	100

### Specifications

Capacitance	2200pF +80/-20%
Rated voltage	6300Vdc
Temperature characteristics (complied standard)	E(JIS)
Capacitance change rate	+20/-55%
Temperature range of temperature characteristics	-25 to 85
Operating temperature range	-25 to 85

### ⚠ Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it ' s specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications.
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.